


DATASHEET

DSub Plug, IDC contacts, flat 25-pole, E-DSF 09 LP III/Z UNC

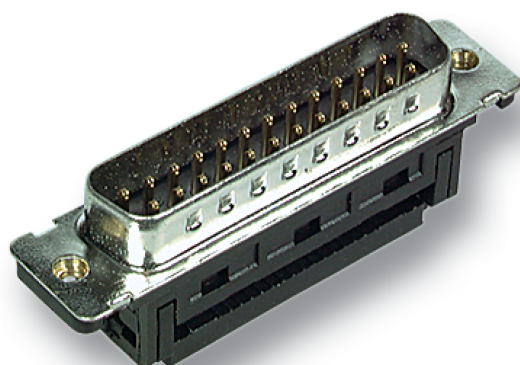

General data

- Quality level III
- UNC thread
- 50 mating cycles

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Number of poles
29065.1	DSub Plug, IDC contacts, flat 09-pole, E-DSF 09 LP III/Z UNC	9
29067.1	DSub Plug, IDC contacts, flat 25-pole, E-DSF 09 LP III/Z UNC	25



datasheets.content.drawings

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.




DATASHEET

DSub Plug, IDC contacts, flat 25-pole, E-DSF 09 LP III/Z UNC

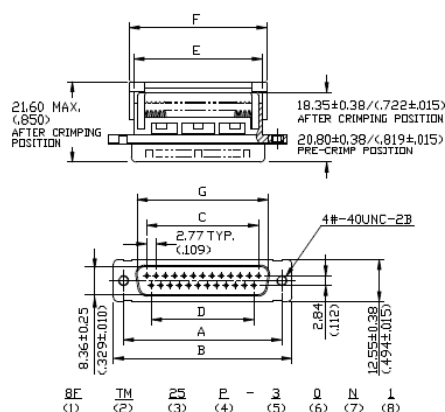

SPECIFICATION :
 CURRENT RATING : 1 AMP.
 INSULATOR RESISTANCE : 1000 MΩ MIN. (AT 500 V DC)
 DIELECTRIC WITHSTANDING VOLTAGE : AC 500 V MIN. (FOR 1 MINUTE)
 OPERATING TEMPERATURE : -55°C TO 105°C
 CONTACT RESISTANCE : 15mΩ MAX.
 INSULATOR MATERIAL : PBT WITH GLASS-FIBER REINFORCED UL 94V-0
 CONTACT MATERIAL : BRASS
 CONTACT PLATING : GOLD OVER NICKEL
 WIRE SIZE : AWG 26 & 28 STRANDED , 1.27mm CONDUCTOR CENTRE FLAT CABLE

8FTW37P	37	63.50(2.500)	69.40(2.732)	49.86(1.963)	47.09(1.854)	54.60(2.150)	57.10(2.248)
8FTW25P	25	47.04(1.852)	53.09(2.090)	33.24(1.309)	30.47(1.200)	38.14(1.502)	40.90(1.610)
8FTW15P	15	33.32(1.312)	39.10(1.539)	19.39(.763)	16.62(.654)	24.00(.945)	26.60(1.047)
8FTW09P	9	24.99(.984)	30.80(1.212)	11.08(.436)	8.31(.327)	16.10(.634)	18.60(.732)
CATALOG NO.	NO. OF POSITIONS	A ±0.13 (±.005)	B ±0.25 (±.010)	C ±0.13 (±.005)	D ±0.13 (±.005)	E ±0.25 (±.010)	F ±0.25 (±.010)

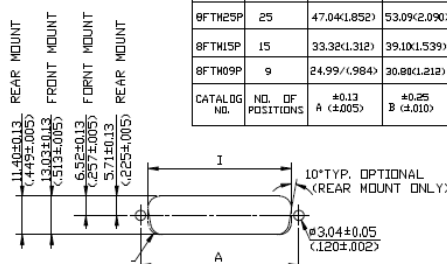

55.45(2.183)	59.08(2.326)	60.73(2.391)
38.96(1.534)	42.52(1.674)	44.27(1.743)
25.23(1.994)	28.80(1.134)	30.53(1.202)
16.92(.666)	20.47(.806)	22.20(.874)
G ±0.25 (±.010)	H ±0.13(±.005) REAR MOUNTING	I ±0.13(±.005) FRONT MOUNTING

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.