


DATASHEET

DSub Plug 9.4mm, euro. st. angled, E-DS 09A/KG-T1

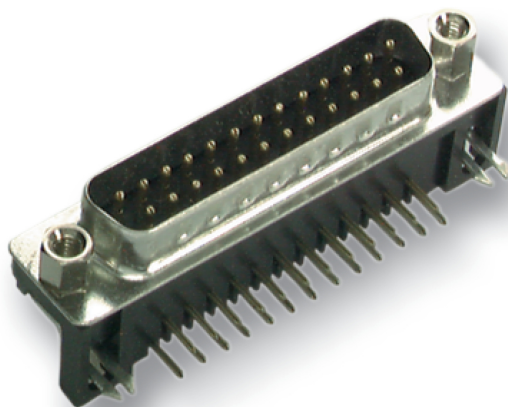

General data

- Quality level III
- UNC 4-40 bolts
- PushFit snap-in fastening element

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Number of poles
29259.1	DSub Plug 9.4mm, euro. st. angled, E-DS 09A/KG-T1	9

datasheets.content.drawings

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

DSub Plug 9.4mm, euro. st. angled, E-DS 09A/KG-T1

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA

Insulator Resistance: 1000MΩmin. at DC 500V

Current Rating: 5 AMP

Dielectric Withstanding


Voltage: AC 1000V For 1 minute

Operating Temperature: -55°C~+105°C



Contact: Brass or Phosphor Bronze

Housing: PBT & 30% Glass Fiber (UL 94V-O)

MALE

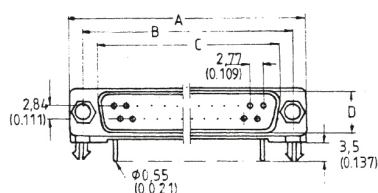


FEMALE

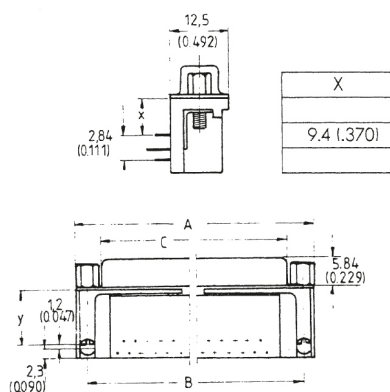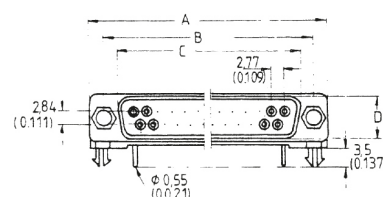

Dimension

No. of contacts	A	B	C	D
9	30.8	25.0	16.9	8.4
15	39.2	33.3	25.3	8.4
25	53.0	47.0	39.0	8.4
37	69.4	63.5	55.4	8.4

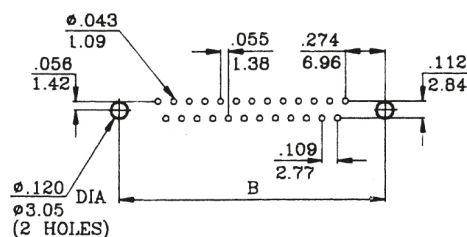

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.