


DATASHEET

DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1

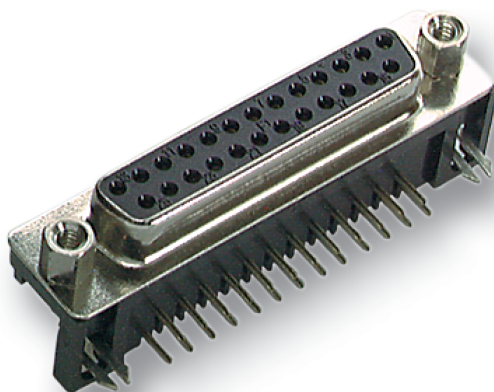

General data

- Quality level III
- UNC 4-40 bolts
- PushFit snap-in fastening element

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Number of poles
34701.1	DSub Jack 9.4mm Euro Standard, EDF 09 A/KG-T1	9
34702.1	DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1	15




datasheets.content.drawings

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.




DATASHEET

DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1

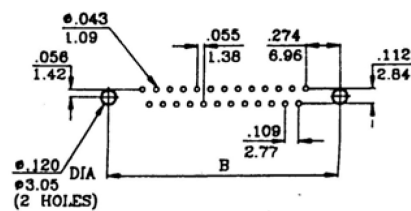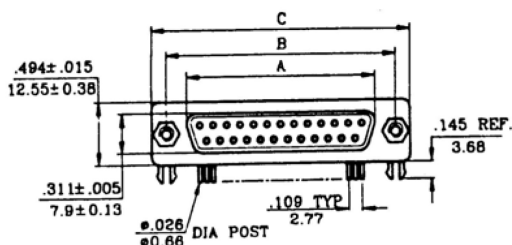

PCB HOLE PATTERNS

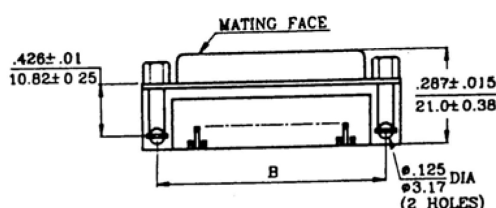

DIMENSIONS

SHELL SIZE	A .010 0.25	B .005 0.13	C .015 0.38
9	0.643 16.33	0.984 24.99	1.213 30.81
15	0.971 24.66	1.312 33.32	1.541 39.14
25	1.511 38.38	1.852 47.04	2.088 53.04
37	2.159 54.84	2.500 63.50	2.729 69.32

ORDERING INFORMATION:

POLE	PART NO.
09	34701.1
15	34702.1
25	34703.1
37	34704.1

RoHS COMPLIANT

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin at DC 500V
Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C~+105°C
Contact: Brass or Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-O)

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.

