



# DATASHEET

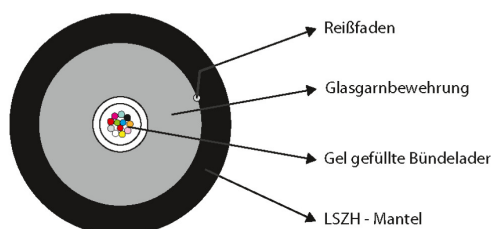

## General data

### Application:

For fixed installation indoor and outdoor

In cable ducts, tubes and interconnections

Mechanical installation by winch is permitted only when using force meters with recording function

Not suitable for underground laying (direct buried)

### Characteristics:

Universale cable

Suitable for connector assembly

The cable diameter can vary

## Tekniske egenskaber

## Available variants

| ArtNr.       | Bezeichnung | CPR-Class | Cable Ø | Category | Number of fibres | Tensile force max. |
|--------------|-------------|-----------|---------|----------|------------------|--------------------|
| 54204.1L-CPR |             | Dca       | 7.0 mm  | OM2      | 4                | 1750 N             |
| 54208.1L-CPR |             | Dca       | 7.0 mm  | OM2      | 8                | 1750 N             |
| 54212.1L-CPR |             | Dca       | 7.0 mm  | OM2      | 12               | 1750 N             |
| 54224.1L-CPR |             | Dca       | 7.5 mm  | OM2      | 24               | 1750 N             |

This datasheet was created automatically on 27-09-2026 . Technical changes reserved.



# DATASHEET

## Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 27-09-2026 . Technical changes reserved.

