


DATASHEET



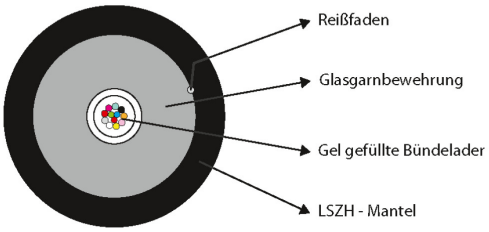





General data

Application:
For fixed installation indoor and outdoor
In cable ducts, tubes and interconnections
Mechanical installation by winch is permitted only when using force meters with recording function
Not suitable for underground laying (direct buried)

Characteristics:
Universale cable
Suitable for connector assembly

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.
54204.1L-CPR		Dca	7.0 mm	OM2	4	1750 N
54208.1L-CPR		Dca	7.0 mm	OM2	8	1750 N
54212.1L-CPR		Dca	7.0 mm	OM2	12	1750 N
54224.1L-CPR		Dca	7.5 mm	OM2	24	1750 N

This datasheet was created automatically on 22-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION