




DATASHEET

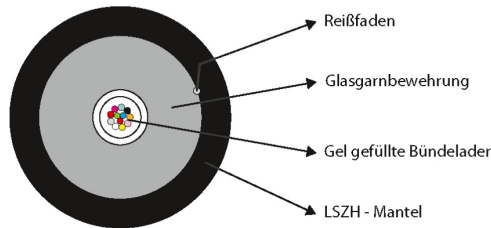

General data

Areas of application:

For connecting buildings

To the campus cabling

For direct burial (according to installation instructions)

For insertion in plastic pipe systems

For installation in cable ducts and on platforms

Saving of splicing work at building entrance

Characteristics:

Easy to process construction

Tearing thread for opening/removing the cable sheath

Gel-free cable construction for clean and quick installation

Small dimensions

High installation stability

Fire behaviour tested and certified according to

Construction Products Ordinance (see Euro Fire Class)

The cable diameter can vary

Tekniske egenskaber

Available variants

This datasheet was created automatically on 13-09-2026 . Technical changes reserved.



DATASHEET

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.
54208.1A-CPR		Dca	6.0 mm	OM2	8	2000 N
54224.1A-CPR		Dca	7.2 mm	OM2	24	2000 N

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 13-09-2026 . Technical changes reserved.

