


DATASHEET

INFRALAN® U-DQ(ZN)BH OS2 24E (1x24) Dca 1750N LSZH black 7.5mm G657A1



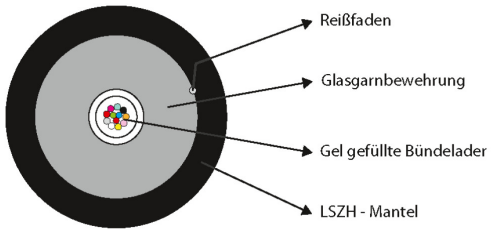





General data

Application:
For fixed installation indoor and outdoor
In cable ducts, tubes and interconnections
Mechanical installation by winch is permitted only when using force meters with recording function
Not suitable for underground laying (direct buried)

Characteristics:
Universale cable
Suitable for connector assembly

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	VDE-Name	Weight

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

INFRALAN® U-DQ(ZN)BH OS2 24E (1x24) Dca 1750N LSZH black 7.5mm G657A1

54404.1L-CPR	INFRALAN® U-DQ(ZN)BH OS2 4E (1x4) Dca 1750N LSZH black 7.0mm G657A1	Dca	7.0 mm	OS2	4	1750 N	04E (1 x 4) Singlemode G.657.A1	7.0 mm	140 mm	U-DQ(ZN)BH 4E9/125	55 kg/km
54408.1L-CPR	INFRALAN® U-DQ(ZN)BH OS2 8E (1x8) Dca 1750N LSZH black 7.0mm G657A1	Dca	7.0 mm	OS2	8	1750 N	08E (1 x 8) Singlemode G.657.A1	7.0 mm	140 mm	U-DQ(ZN)BH 8E9/125	55 kg/km
54412.1L-CPR	INFRALAN® U-DQ(ZN)BH OS2 12E (1x12) Dca 1750N LSZH black 7.0mm G657A1	Dca	7.0 mm	OS2	12	1750 N	12E (1 x 12) Singlemode G.657.A1	7.0 mm	140 mm	U-DQ(ZN)BH 12E9/125	55 kg/km
54424.1L-CPR	INFRALAN® U-DQ(ZN)BH OS2 24E (1x24) Dca 1750N LSZH black 7.5mm G657A1	Dca	7.5 mm	OS2	24	1750 N	24E (1 x 24) Singlemode G.657.A1	7.5 mm	150 mm	U-DQ(ZN)BH 24E9/125	60 kg/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION