



DATASHEET

INFRALAN® U-DQ(ZN)BH OS2 48E (4x12) Eca 5000N LSZH
black 11.2mm G657A1

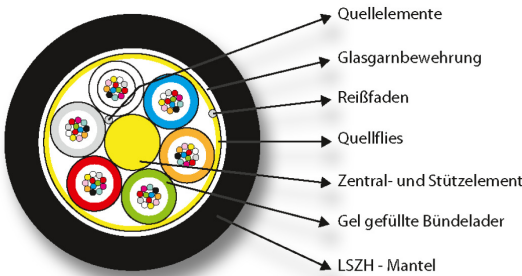

General data

Application:

For fixed installation indoor and outdoor
In cable ducts, tubes and interconnections
Mechanical installation by winch is permitted only when using force meters with recording function
Not suitable for underground laying (direct buried)

Characteristics:

Universale cable
Suitable for connector assembly

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category of fibres	Number	Tensile force max.	Construct	Outer diameter approx.	Bending radius	VDE-Name	Weight
--------	-------------	-----------	------------	-----------------------	--------	--------------------------	-----------	------------------------------	-------------------	----------	--------

This datasheet was created automatically on 07-10-2026 . Technical changes reserved.



EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION



DATASHEET

INFRALAN® U-DQ(ZN)BH OS2 48E (4x12) Eca 5000N LSZH black 11.2mm G657A1

54448.1L-CPR	INFRALAN® U-DQ(ZN)BH OS2 48E (4x12) Eca 5000N LSZH black 11.2mm G657A1	Eca	11.2 mm	OS2	48	5000 N	48E (4 x 12) Singlemode G.657.A1	11.2 mm	170 mm	U-DQ(ZN)BH 48E9/125	130 kg/km
54496.1L-CPR	INFRALAN® U-DQ(ZN)BH OS2 96E (8x12) Eca 5000N LSZH black 13.1mm G657A1	Eca	13.1 mm	OS2	96	5000 N	96E (8 x 12) Singlemode G.657.A1	13.1 mm	200 mm	U-DQ(ZN)BH 96E9/125	165 kg/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 07-10-2026 . Technical changes reserved.

