




DATASHEET

INFRALAN® U-DQ(ZN)BH OM5 4G (1x4) Dca 1750N LSZH
black 7.0mm

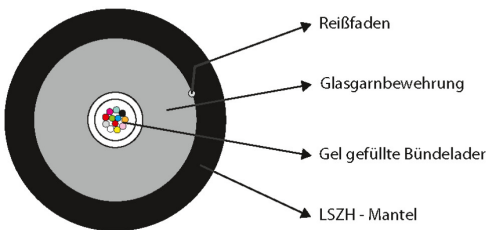

General data

Application:
For fixed installation indoor and outdoor
In cable ducts, tubes and interconnections
Mechanical installation by winch is permitted only when using force meters with recording function
Not suitable for underground laying (direct buried)

Characteristics:
Universale cable
Suitable for connector assembly

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	VDE-Name	Weight
--------	-------------	-----------	------------	----------	------------------------	--------------------------	-----------	------------------------------	-------------------	----------	--------

This datasheet was created automatically on 23-09-2026 . Technical changes reserved.



EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

DATASHEET

INFRALAN® U-DQ(ZN)BH OM5 4G (1x4) Dca 1750N LSZH black 7.0mm

54504.1OM5-CPR	INFRALAN® U-DQ(ZN)BH OM5 4G (1x4) Dca 1750N LSZH black 7.0mm	Dca	7.0 mm	OM5	4	1750 N	4G (1 x 4) Multimode OM5	7.0 mm	140 mm	U-DQ(ZN)BH 4G50/125	55 kg/km
54512.1OM5-CPR	INFRALAN® U-DQ(ZN)BH OM5 12G (1x12) Dca 1750N LSZH black 7.0mm	Dca	7.0 mm	OM5	12	1750 N	12G (1 x 12) Multimode OM5	7.0 mm	140 mm	U-DQ(ZN)BH 12G50/125	55 kg/km
54524.1OM5-CPR	INFRALAN® U-DQ(ZN)BH OM5 24G (1x24) Dca 1750N LSZH black 7.5mm	Dca	7.5 mm	OM5	24	1750 N	24G (1 x 24) Multimode OM5	7.5 mm	150 mm	U-DQ(ZN)BH 24G50/125	60 kg/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-09-2026 . Technical changes reserved.

