



DATASHEET

INFRALAN® U-DQ(ZN)BH OM4 48G (4x12) Eca 5000N
LSZH black 11.2mm

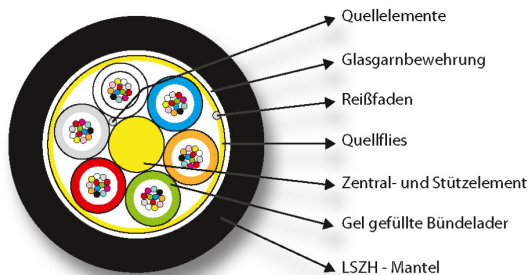

General data

Application:

For fixed installation indoor and outdoor

In cable ducts, tubes and interconnections

Mechanical installation by winch is permitted only when using force meters with recording function

Not suitable for underground laying (direct buried)

Characteristics:

Universale cable

Suitable for connector assembly

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category of fibres	Number of fibres	Tensile force max.	Construct diameter	Outer diameter approx.	Bending radius	VDE-Name	Weight
--------	-------------	-----------	------------	-----------------------	---------------------	--------------------------	-----------------------	------------------------------	-------------------	----------	--------

This datasheet was created automatically on 15-09-2026 . Technical changes reserved.



DATASHEET

**INFRALAN® U-DQ(ZN)BH OM4 48G (4x12) Eca 5000N
LSZH black 11.2mm**

54548.2L-CPR	INFRALAN® U-DQ(ZN)BH OM4 48G (4x12) Eca 5000N LSZH black 11.2mm	Eca	11.2 mm	OM4	48	5000 N	48G (4 x 12) Multimode OM4	11.2 mm	170 mm	U-DQ(ZN)BH 4x12G50/125	130 kg/km
--------------	---	-----	------------	-----	----	--------	---------------------------------------	---------	--------	---------------------------	--------------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 15-09-2026 . Technical changes reserved.

