


DATASHEET

I-V(ZN)HH Breakout OM2 2G (2x1) Eca 600N LSZH orange 2.8mm

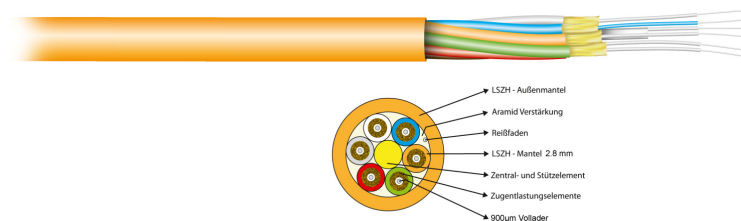

General data

Indoor application
 Installation in shafts, underfloor area
 Secondary cabling (vertical): riser area (backbone)
 Tertiary cabling (horizontal): working area, fiber-to-the-desk FTTD
 Trunk cable, patch- and adapter cable
 Indoor cable
 Non-metallic, halogenfree, gel free
 Suitable for connector assembly
 Operation: -20°C ~ 60°C
 Installation: -5°C ~ 50°C

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	VDE-Name	Weight
55002.1	I-V(ZN)HH Breakout OM2 2G (2x1) Eca 600N LSZH orange 2.8mm	Eca	3.9 x 6.8 mm	OM2	2	600 N	02G (2 x 2.8) Multimode OM2	3.9x6.8 mm	60 mm	I-V(ZN)HH 02G50/125	28 kg/km
55004.1	I-V(ZN)HH Breakout OM2 4G (4x1) Eca 800N LSZH orange 2.0mm	Eca	8.3 mm	OM2	4	800 N	04G (4 x 2.8) Multimode OM2	8.5 mm	150 mm	I-V(ZN)HH 04G50/125	62 kg/km
55008.1	I-V(ZN)HH Breakout OM2 8G (8x1) Eca 1000N LSZH orange 2.8mm	Eca	12.1 mm	OM2	8	1000 N	08G (8 x 2.8) Multimode OM2	12.1 mm	210 mm	I-V(ZN)HH 08G50/125	133 kg/km

This datasheet was created automatically on 14-09-2026 . Technical changes reserved.



DATASHEET

I-V(ZN)HH Breakout OM2 2G (2x1) Eca 600N LSZH orange 2.8mm

55012.1	I-V(ZN)HH Breakout OM2 12G (12x1) Eca 1000N LSZH orange 2.8mm	Eca	15.8 mm	OM2	12	1000 N	12G (12 x 2.8) Multimode OM2	15.8 mm	275 mm	I-V(ZN)HH 12G50/125	240 kg/km
---------	---	-----	------------	-----	----	--------	---	---------	--------	------------------------	--------------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 14-09-2026 . Technical changes reserved.

