


DATASHEET

I-V(ZN)HH Breakout OM3 2G (2x1) Eca 600N LSZH aqua 2.8mm

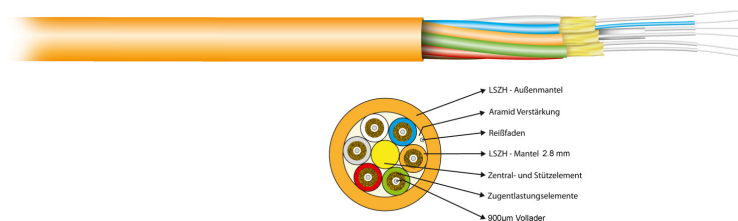

General data

Indoor application
 Installation in shafts, underfloor area
 Secondary cabling (vertical): riser area (backbone)
 Tertiary cabling (horizontal): working area, fiber-to-the-desk FTTD
 Trunk cable, patch- and adapter cable
 Indoor cable
 Non-metallic, halogenfree, gel free
 Suitable for connector assembly
 Operation: -20°C ~ 60°C
 Installation: -5°C ~ 50°C

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category of fibres	Number of fibres	Tensile force max.	Construct diameter	Outer diameter approx.	Bending radius	VDE-Name	Weight
55002.1OM3	I-V(ZN)HH Breakout OM3 2G (2x1) Eca 600N LSZH aqua 2.8mm	Eca	3.9 x 6.8 mm	OM3	2	600 N	02G (2 x 2.8) Multimode OM3	3.9x6.8 mm	60 mm	I-V(ZN)HH 02G50/125	28 kg/km
55004.1OM3	I-V(ZN)HH Breakout OM3 4G (4x1) Eca 800N LSZH aqua 2.8mm	Eca	8.3 mm	OM3	4	800 N	04G (4 x 2.8) Multimode OM3	8.5 mm	150 mm	I-V(ZN)HH 04G50/125	62 kg/km
55008.1OM3	I-V(ZN)HH Breakout OM3 8G (8x1) Eca 1000N LSZH aqua 2.8mm	Eca	9.4 mm	OM3	8	1000 N	08G (8 x 2.8) Multimode OM3	12.1 mm	210 mm	I-V(ZN)HH 08G50/125	133 kg/km

This datasheet was created automatically on 10-09-2026 . Technical changes reserved.



DATASHEET

I-V(ZN)HH Breakout OM3 2G (2x1) Eca 600N LSZH aqua 2.8mm

55012.10M3	I-V(ZN)HH Breakout OM3 12G (12x1) 1000N LSZH aqua 2.8mm	Eca	15.8 mm	OM3	12	1000 N	12G (12 x 2.8) Multimode OM3	15.8 mm	275 mm	I-V(ZN)HH 12G50/125	240 kg/km
------------	--	-----	------------	-----	----	--------	---	---------	--------	------------------------	--------------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 10-09-2026 . Technical changes reserved.

