
DATASHEET

I-V(ZN)HH Breakout OM4 2G (2x1) Eca 600N LSZH erica violet 2.8mm

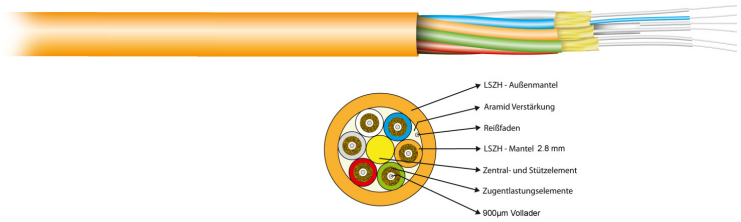

General data

Indoor application
Installation in shafts, underfloor area
Secondary cabling (vertical): riser area (backbone)
Tertiary cabling (horizontal): working area, fiber-to-the-desk FTTD
Trunk cable, patch- and adapter cable
Indoor cable
Non-metallic, halogenfree, gel free
Suitable for connector assembly
Operation: -20°C ~ 60°C
Installation: -5°C ~ 50°C

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	VDE-Name	Weight
55002.1OM4	I-V(ZN)HH Breakout OM4 2G (2x1) Eca 600N LSZH erica violet 2.8mm	Eca	3.9 x 6.8 mm	OM4	2	600 N	02G (2 x 2.8) Multimode OM4	3.9x6.8 mm	60 mm	I-V(ZN)HH 2G 50/125	28 kg/km
55004.1OM4	I-V(ZN)HH Breakout OM4 4G (4x1) 800N LSZH turquoise 2.8mm	Eca	8.3 mm	OM4	4	800 N	04G (4 x 2.8) Multimode OM4	8.5 mm	150 mm	I-V(ZN)HH 4G 50/125	62 kg/km
55008.1OM4		Eca	9.4 mm	OM4	8	1000 N					

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION