


DATASHEET

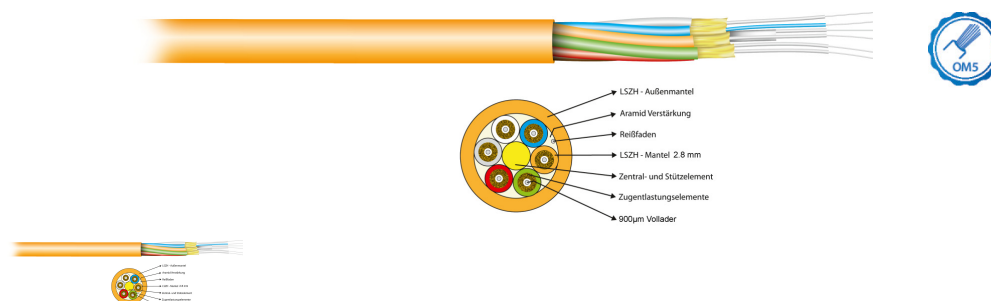

General data

Indoor application
 Installation in shafts, underfloor area
 Secondary cabling (vertical): riser area (backbone)
 Tertiary cabling (horizontal): working area, fiber-to-the-desk FTTD
 Trunk cable, patch- and adapter cable
 Indoor cable
 Non-metallic, halogenfree, gel free
 Suitable for connector assembly
 Operation: -20°C ~ 60°C
 Installation: -5°C ~ 50°C

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.
55002.10M5		Eca	3.9 x 6.8 mm	OM5	2	600 N

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 10-09-2026 . Technical changes reserved.

