



# DATASHEET

## A-DQ(ZN)B2Y 24G 50/125μ OM3 PE black

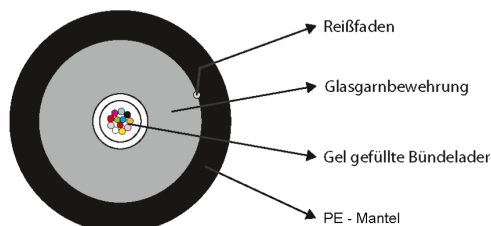

### General data

#### Application:

For fixed installation outdoor

In cable ducts, tubes and interconnections

Mechanical installation by winch is permitted only when using force meters with recording function

Suitable for underground laying (direct buried)

#### Characteristics:

Outdoor cable

Resistant to oil, petrol, acid and leach

The cable diameter can vary

### Tekniske egenskaber

### Available variants

| ArtNr.     | Bezeichnung                                | Cable Ø | Category | Number of fibres | Tensile force max. | Construct                    | Outer diameter approx. | Bending radius | Weight   |
|------------|--------------------------------------------|---------|----------|------------------|--------------------|------------------------------|------------------------|----------------|----------|
| 55224.10M3 | A-DQ(ZN)B2Y<br>24G 50/125μ<br>OM3 PE black | 7.3 mm  | OM3      | 24               | 1750 N             | 24G ( 1 x 24 ) Multimode OM3 | 7.3 mm                 | 150 mm         | 43 kg/km |

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.



# DATASHEET

A-DQ(ZN)B2Y 24G 50/125μ OM3 PE black

## Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

