


DATASHEET

A-DQ(ZN)B2Y 24G 50/125µ OM3 PE black



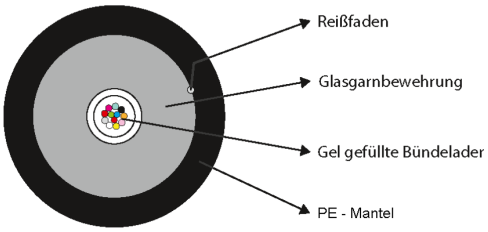





General data

Application:
For fixed installation outdoor
In cable ducts, tubes and interconnections
Mechanical installation by winch is permitted only when using force meters with recording function
Suitable for underground laying (direct buried)

Characteristics:
Outdoor cable
Resistant to oil, petrol, acid and leach

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	Weight
55224.1OM3	A-DQ(ZN)B2Y 24G 50/125µ OM3 PE black	7.3 mm	OM3	24	1750 N	24G (1 x 24) Multimode OM3	7.3 mm	150 mm	43 kg/km

This datasheet was created automatically on 22-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

A-DQ(ZN)B2Y 24G 50/125µ OM3 PE black

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION