



DATASHEET

A-DQ(ZN)B2Y OS2 4E (1x4) Fca 1750N PE black 7.1mm
G657A1

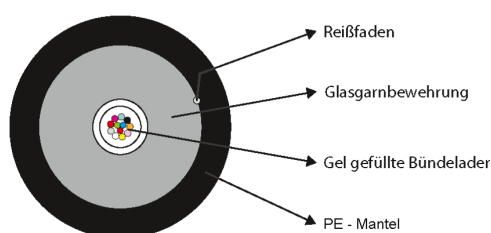

General data

Application:

For fixed installation outdoor

In cable ducts, tubes and interconnections

Mechanical installation by winch is permitted only when using force meters with recording function

Suitable for underground laying (direct buried)

Characteristics:

Outdoor cable

Resistant to oil, petrol, acid and leach

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Cable Ø	Category	Number of fibres	Tensile force max.	Bending radius	Cable Ø	Tensile Force	Weight
--------	-------------	------------	----------	---------------------	--------------------------	-------------------	------------	------------------	--------

This datasheet was created automatically on 28-09-2026 . Technical changes reserved.



DATASHEET

A-DQ(ZN)B2Y OS2 4E (1x4) Fca 1750N PE black 7.1mm G657A1

55404.1	A-DQ(ZN)B2Y OS2 4E (1x4) Fca 1750N PE black 7.1mm G657A1	7.1 mm	OS2	4	1750 N	140 mm	7.1 mm	1750 N	39 kg/km
55408.1	A-DQ(ZN)B2Y OS2 8E (1x8) Fca 1750N PE black 7.1mm G657A1	7.1 mm	OS2	8	1750 N	140 mm	7.1 mm	1750 N	39 kg/km
55412.1	A-DQ(ZN)B2Y OS2 12E (1x12) Fca 1750N PE black 7.1mm G657A1	7.1 mm	OS2	12	1750 N	140 mm	7.1 mm	1750 N	39 kg/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 28-09-2026 . Technical changes reserved.

