


DATASHEET

A-DQ(ZN)B2Y OS2 24E (1x24) Fca 1750N PE schwarz 7,3mm G657A1



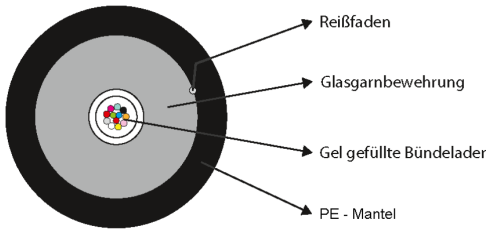





General data

Einsatzgebiete:
Zur ortsfesten Verlegung außerhalb von Gebäuden
In Kabelkanälen, Rohren und auf Kabelpritschen
Maschinelles Einziehen nur mit aufzeichnenden Kraftmesseinrichtungen zulässig
Direkte Erdverlegung zulässig

Merkmale:
Außenkabel
Beständig gegen Öl, Benzin, Säuren und Laugen

Der Kabeldurchmesser kann variieren

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	Weight

This datasheet was created automatically on 17-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

A-DQ(ZN)B2Y OS2 24E (1x24) Fca 1750N PE schwarz 7,3mm G657A1

55424.1	A-DQ(ZN)B2Y OS2 24E (1x24) Fca 1750N PE schwarz 7,3mm G657A1	7.3 mm	OS2	24	1750 N	24E (1 x 24) Singlemode G.657.A1	7,3 mm	150 mm	43 kg/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION