


DATASHEET

A-DQ(ZN)B2Y OS2 24E (1x24) Fca 1750N PE schwarz
7,3mm G657A1

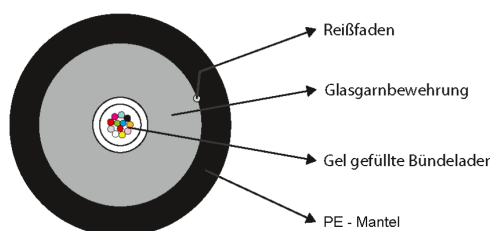

General data

Einsatzgebiete:

Zur ortsfesten Verlegung außerhalb von Gebäuden
In Kabelkanälen, Rohren und auf Kabelpritschen
Maschinelles Einziehen nur mit aufzeichnenden Kraftmesseinrichtungen zulässig
Direkte Erdverlegung zulässig

Merkmale:

Außenkabel
Beständig gegen Öl, Benzin, Säuren und Laugen

Der Kabeldurchmesser kann variieren

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	Weight
--------	-------------	---------	----------	------------------	--------------------	-----------	------------------------	----------------	--------

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.



DATASHEET

A-DQ(ZN)B2Y OS2 24E (1x24) Fca 1750N PE schwarz 7,3mm G657A1

55424.1	A-DQ(ZN)B2Y OS2 24E (1x24) Fca 1750N PE schwarz 7,3mm G657A1	7.3 mm	OS2	24	1750 N	24E (1 x 24) Singlemode G.657.A1	7,3 mm	150 mm	43 kg/km
---------	---	-----------	-----	----	--------	--	--------	--------	-------------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.

