




DATASHEET

A-DQ(ZN)B2Y OS2 24E (2x12), Fca 4500N PE black
10.0mm G652D

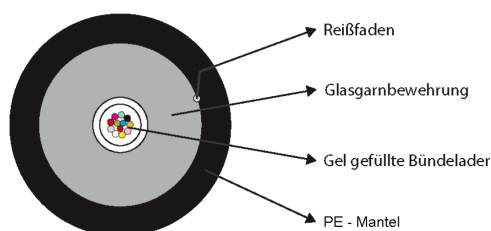

General data

Application:

For fixed installation outdoor

In cable ducts, tubes and interconnections

Mechanical installation by winch is permitted only when using force meters with recording function

Suitable for underground laying (direct buried)

Characteristics:

Outdoor cable

Resistant to oil, petrol, acid and leach

The cable diameter can vary

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Outer diameter approx.	Bending radius	Weight
--------	-------------	------------	----------	---------------------	--------------------------	-----------	------------------------------	-------------------	--------

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.



DATASHEET

A-DQ(ZN)B2Y OS2 24E (2x12), Fca 4500N PE black 10.0mm G652D

55424.3A	A-DQ(ZN)B2Y OS2 24E (2x12), Fca 4500N PE black 10.0mm G652D	10 mm	OS2	24	4500 N	24E (2 x 12) Singlemode G.652.D	10 mm	92 mm	72 kg/km
----------	--	-------	-----	----	--------	---	-------	-------	-------------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

