
DATASHEET



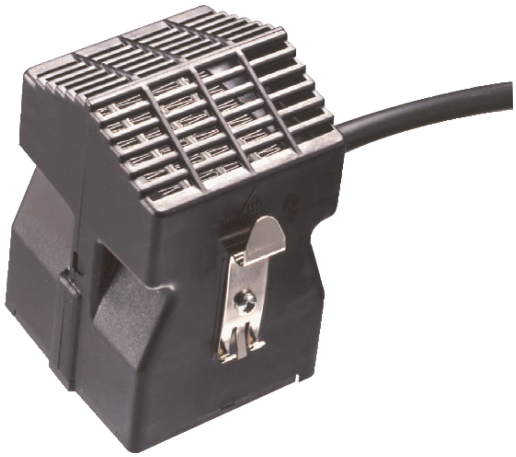

General data

Compact, high-effizient heating module with fan
Fan airflow 10 m³/h, fan Ø 60 mm
2 power levels 200 W / 400 W (+5/-10 %), controlled via connection type
Independent circuit for the fan
Overheat protection (bimetal) > 150 °C
Operating temperature -10°C .. 70°C
Storage temperature -40°C .. 70°C
Protection class II
Scope of delivery: heater, DIN rail 35 x 7.5 mm x 150 mm, 2 x holders, screw terminals for connection

Connection Scheme:
Heater (N): blue
Heater(L, 200 W): red
Heater(L, 400 W): red+black
Fan (N/L): grey

Tekniske egenskaber

Available variants

This datasheet was created automatically on 18-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

ArtNr.	Bezeichnung	Continuous heating power at 20°C	Degree of protection	Depth	Height	Operating voltage at AC 50 Hz	Operating voltage at AC 60 Hz	Rated power	Voltage type	Width	With fan	With room temperature controller
691657.1		200/400 W	IP20	70 mm	95 mm	230 – 230 V	230 – V	200/400 W	AC	71 mm	True	False

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION