


DATASHEET

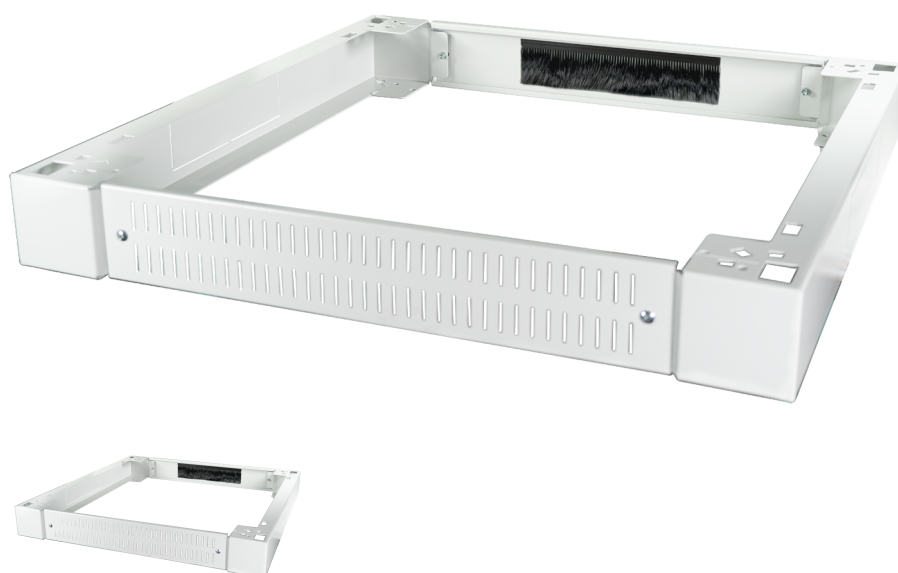

General data

Side and rear elements with pre-punched cutouts for cable entry

Perforated front panel

Suitable for mounting on PRO and Classic series cabinets:

The leveling feet supplied with the cabinet can be used for use with PRO

For use with Classic, 1 x set PRO-NIV01 is also required - please order separately

Base height 100 mm

Suitable for mounting leveling feet M12

Can be stacked on a 200 mm base height by screwing two bases together

Max. Load capacity 600 kg

Material sheet steel

Painting RAL7035, light gray

Scope of delivery: 1 x base, 1 x brush strip, mounting material

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Depth	Max. load capacity	Suitable for enclosure building depth	Suitable for enclosure building width
691750GR.60PB		grey	1000 mm	600 kg	1000 mm	600 mm
691750GR.66PB		grey	600 mm	600 kg	600 mm	600 mm
691750GR.68PB		grey	800 mm	600 kg	800 mm	600 mm
691750GR.80PB		grey	1000 mm	600 kg	1000 mm	800 mm

This datasheet was created automatically on 27-09-2026 . Technical changes reserved.



DATASHEET

691750GR.82PB		grey	1200 mm	600 kg	1200 mm	800 mm
691750GR.88PB		grey	800 mm	600 kg	800 mm	800 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 27-09-2026 . Technical changes reserved.

