
DATASHEET

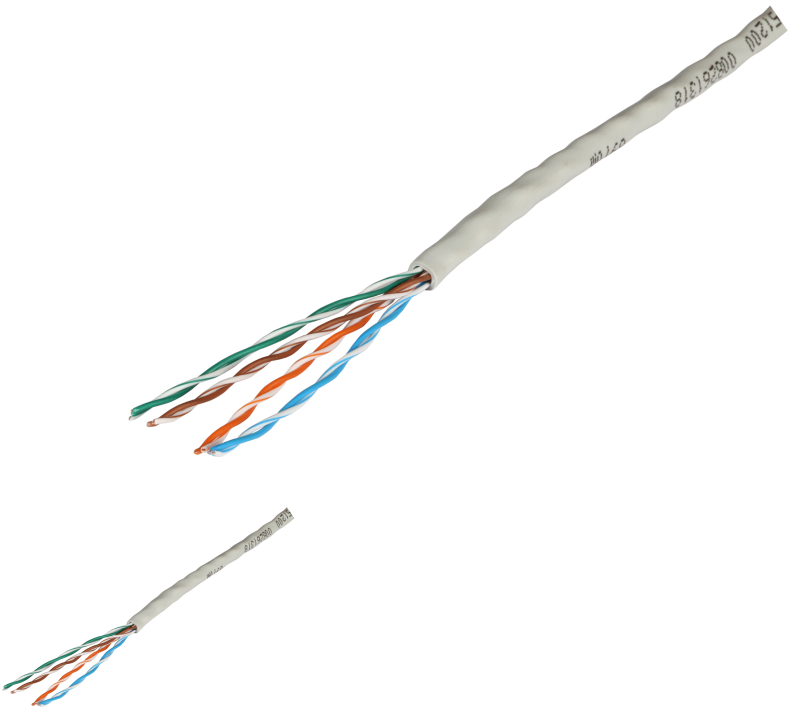

General data

Mechanically high-quality 300 MHz patch cord. Clear differentiation of the cores in the assembled connector thanks to different core colours. Compatible with all common connector systems according to EN 50173 and ISO/IEC 11801 as well as D-Sub systems. As data patch cables in patch panels and as device connection cables. For the transmission of digital and analogue voice, image and data signals. ISDN, Ethernet 10 BASE-T, Fast Ethernet 100 BASE-T, Gigabit Ethernet 1000 BASE-T, Token Ring 4/16 Mbit/s, TP-PMD/TP-DDI 125 Mbit/s, ATM 155 Mbit/s.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length	Number of cores	Type					
99148.1000		grey	1000.0 m	8	simplex					
99148.1	Patch Cable Cat.5e UTP 4x2xAWG26, grey	grey	1.0 m	8	simplex	11 kg/km	25 kg/km	55 N	4.7 mm	344 MJ/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION