
DATASHEET

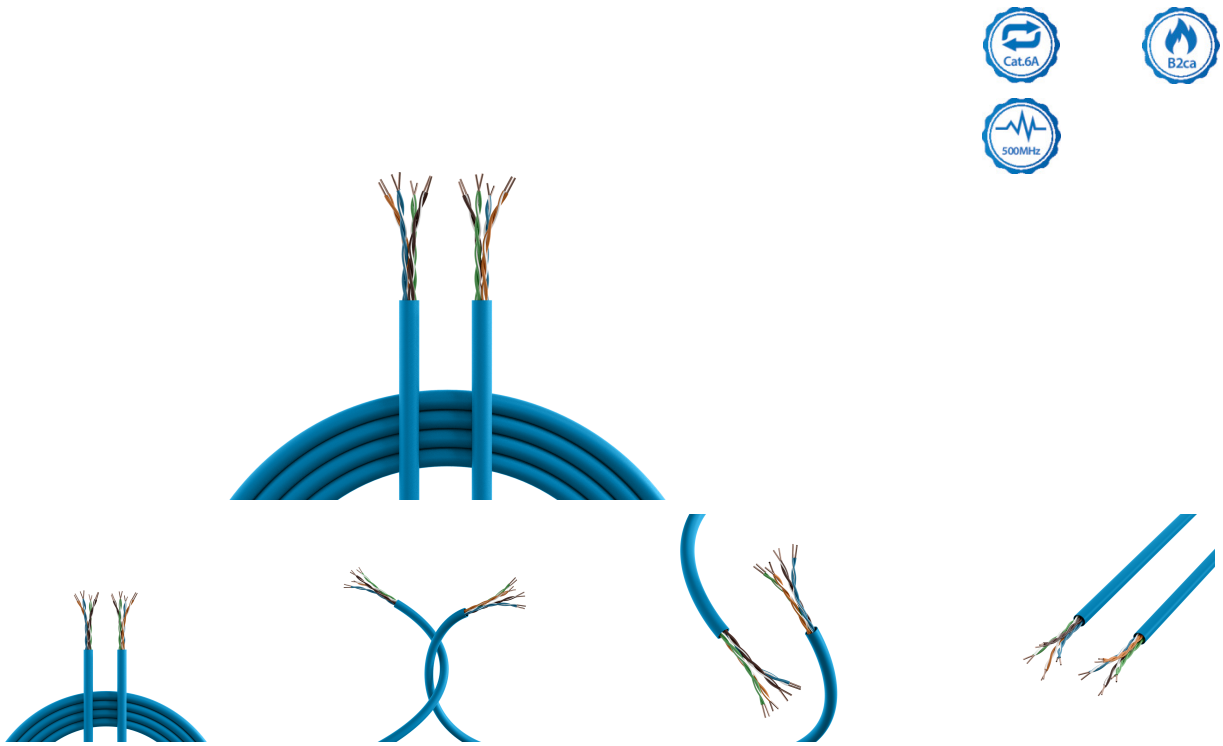

General data

The INFRALAN® U/UTP Cat.6A installation cable is designed for transmissions up to 500MHz and complies with Cat.6A. With this cable, transmission rates of up to 10Gbit Ethernet are possible. Due to the small outer diameter of only 6.6 mm, the cable is also suitable for feed-throughs in narrow cable ducts. Thanks to the B2ca standard according to the Construction Products Regulation and its cable structure of 4x2xAWG23/1, the cable can be used in all areas of installation in buildings.

Areas of application:
Primary (Campus)
Secondary (Riser)
Tertiary (Horizontal)

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length	Number of cores	RAL colour	Type
99960.305-CPR		blue	305 m	8	RAL 5015	simplex

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a

This datasheet was created automatically on 23-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION