


DATASHEET

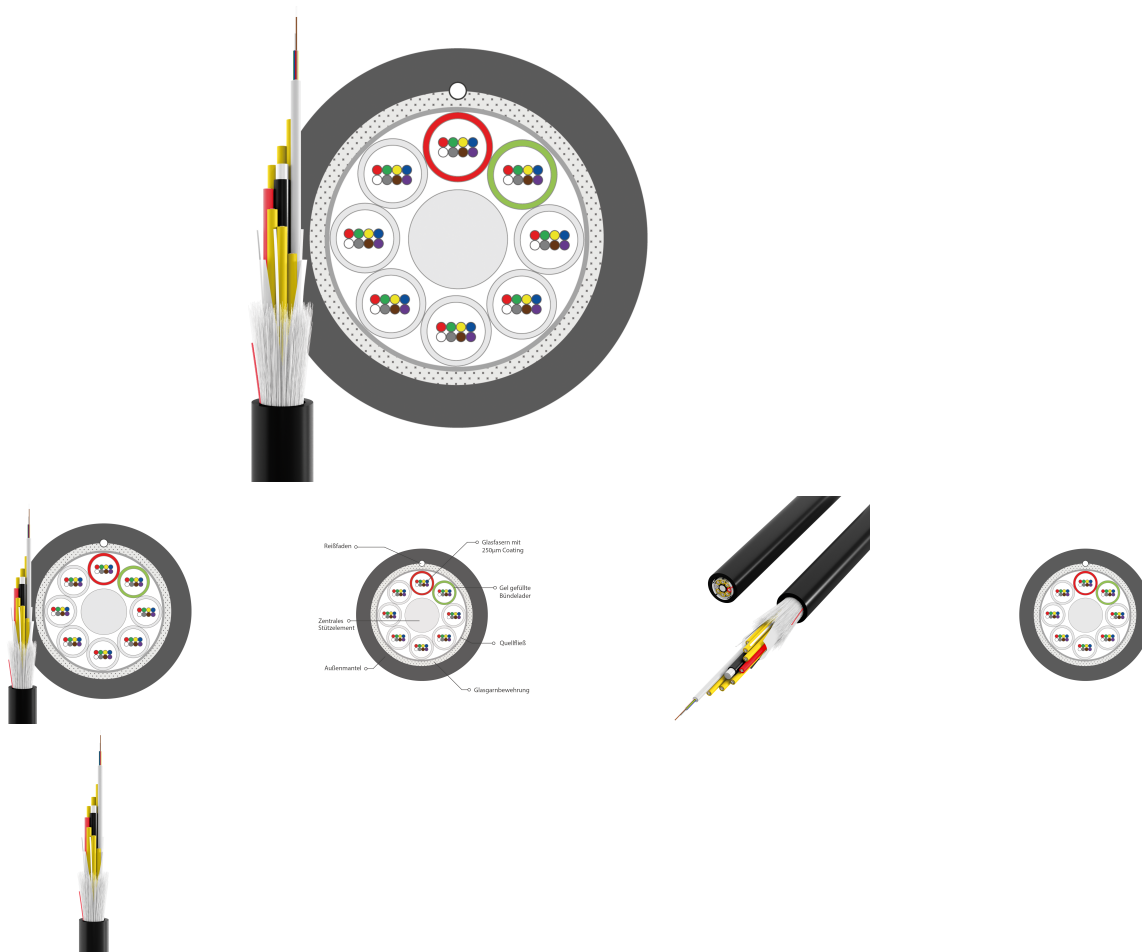

General data

The fiber optic cable, with its stranded, gel-filled loose tube construction and a tensile strength of 5000N, is ideal for structured outdoor cabling. The robust, dielectric design with glass yarn armoring makes the cable longitudinally watertight, UV-resistant, and rodent-proof. A durable PE sheath provides additional protection against mechanical stress.

It is suitable for direct burial, even using trenchless plowing methods, as well as in pipes and shafts. With a temperature range of -40°C to +70°C (operating), the cable is ideal for demanding environments.

This cable is versatile for LAN, MAN, and telecommunications backbones, as well as modern outdoor fiber optic access networks.

Features:

This datasheet was created automatically on 06-09-2026 . Technical changes reserved.



DATASHEET

- Robust outdoor cable for direct burial and ploughing
- Tensile strength up to 5000N – ideal for long distances
- Dielectric construction with E-glass yarns – metal-free and rodent-resistant
- Gel-filled, stranded loose tubes with up to 288 fibers
- Water-blocked and weather-resistant (-40°C to +70°C)
- Black, UV-resistant PE jacket (RAL 9005)
- Color code according to IEC 60794-2 / VDE 0888
- Suitable for backbone and access networks (LAN, MAN, FTTH, FTTB)
- DIN/VDE: A-DQ(ZN)B2Y

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.
A144S2F1		Fca	15.7 mm	OS2	144	5000 N
A48S2F1		Fca	11.1 mm	OS2	48	5000 N
A96S2F1		Fca	12.7 mm	OS2	96	5000 N

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 06-09-2026 . Technical changes reserved.

