


DATASHEET

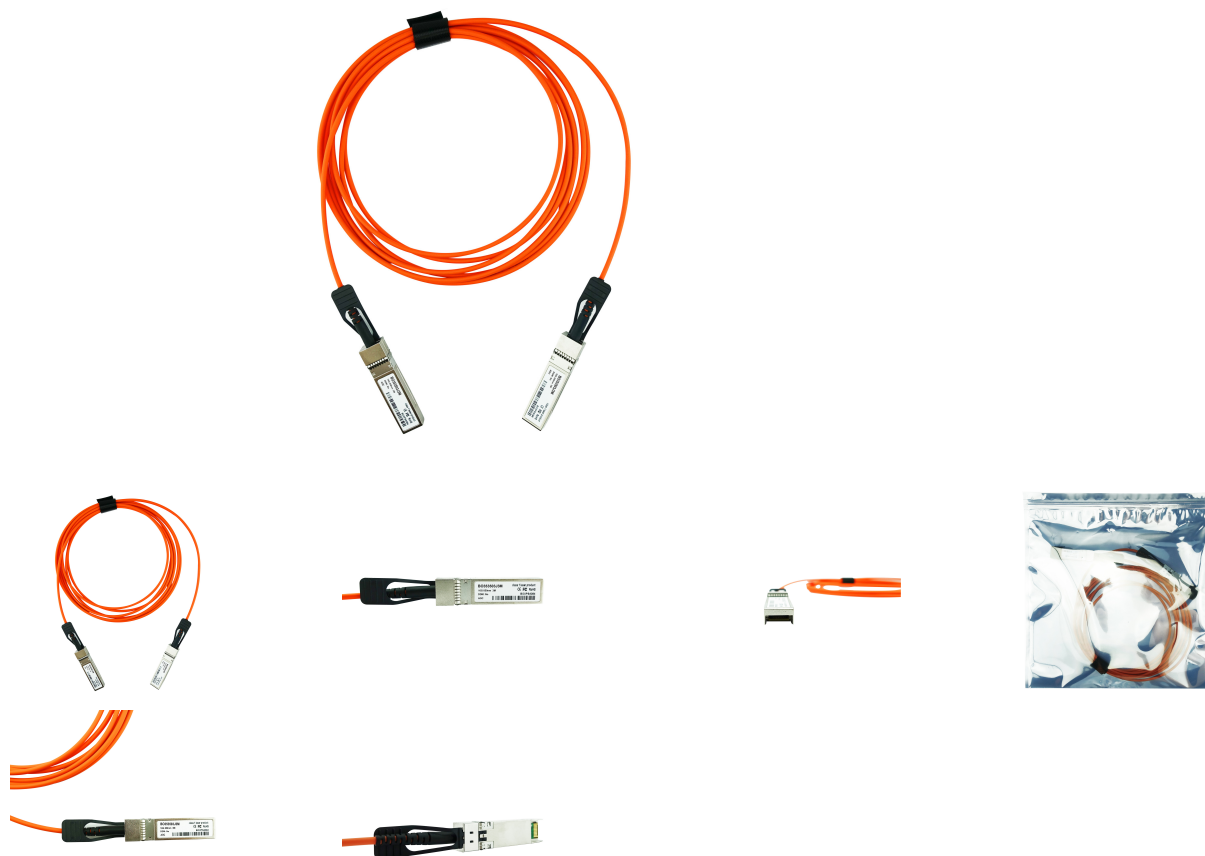

General data

For 10G Ethernet Data Center Intra-Rack and Inter-Rack links
 Hot-pluggable SFP+ cable ends
 Rigid pull-tab for improved high-density installations
 Supports 10.3125 Gb/s bit rate
 RoHS-6 compliant (lead-free)
 SFI limiting interface
 Single 3.3V power supply
 Low power dissipation
 Commercial temperature range: 0° C to 70° C

Tekniske egenskaber

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.



DATASHEET

Available variants		
ArtNr.	Bezeichnung	Length
BO353503J10M-BO		10.0 m
BO353503J1M-BO		1.0 m
BO353503J3M-BO		3.0 m

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

