
DATASHEET

MTP/MPO Cassette SM OS2 2xMPO to 24 LC ,Pol.C (1:2, 2:1) Blue/black

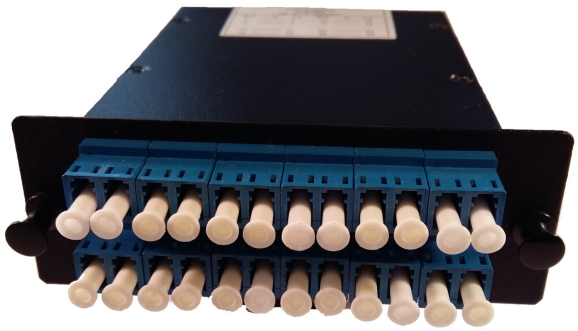

General data

- MTP/ MPO-Male Fanout Cassette, converting one or two MTP/MPO to LC or SC-adapters
LowLoss description means: attenuation per cassette max. 0,35dB
- MTP/ MPO adapters
- Quick lock
- Colour RAL9005

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
DK-819LC24OS2	MTP/MPO Cassette SM OS2 2xMPO to 24 LC ,Pol.A (1:1, 2;2) Blue/black	2	12	24
DK-819LC24OS2-X	MTP/MPO Cassette SM OS2 2xMPO to 24 LC ,Pol.C (1:2, 2:1) Blue/black	2	12	24

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 03-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION