
DATASHEET

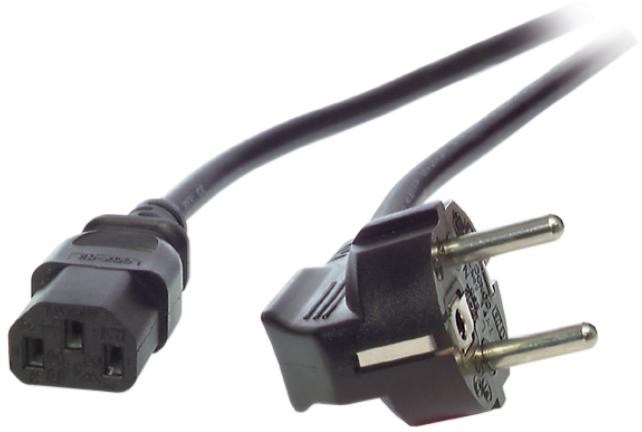

General data

10 A / 250 V VDE tested
Suitable for Germany, Belgium, France and further

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Degree of protection	Length	Nominal current	Nominal voltage	Nominal cross section conductor	Outer diameter approx.
EK504.2V2	Power Cable CEE7/7 90° - C13 180°, Black 2.0 m, 3 x 0.75 mm²	black	IP20	2.0 m	10 A	250 V	0.75 mm²	6.5 mm
EK504.0,5V2		black	IP20	0.5 m	10 A	250 V		
EK504.0,75V2		black	IP20	0.75 m	10 A	250 V		
EK504.1V2		black	IP20	1.0 m	10 A	250 V		
EK504.3V2		black	IP20	3.0 m	10 A	250 V		
EK504.5V2		black	IP20	5.0 m	10 A	250 V		

datasheets.content.drawings


This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

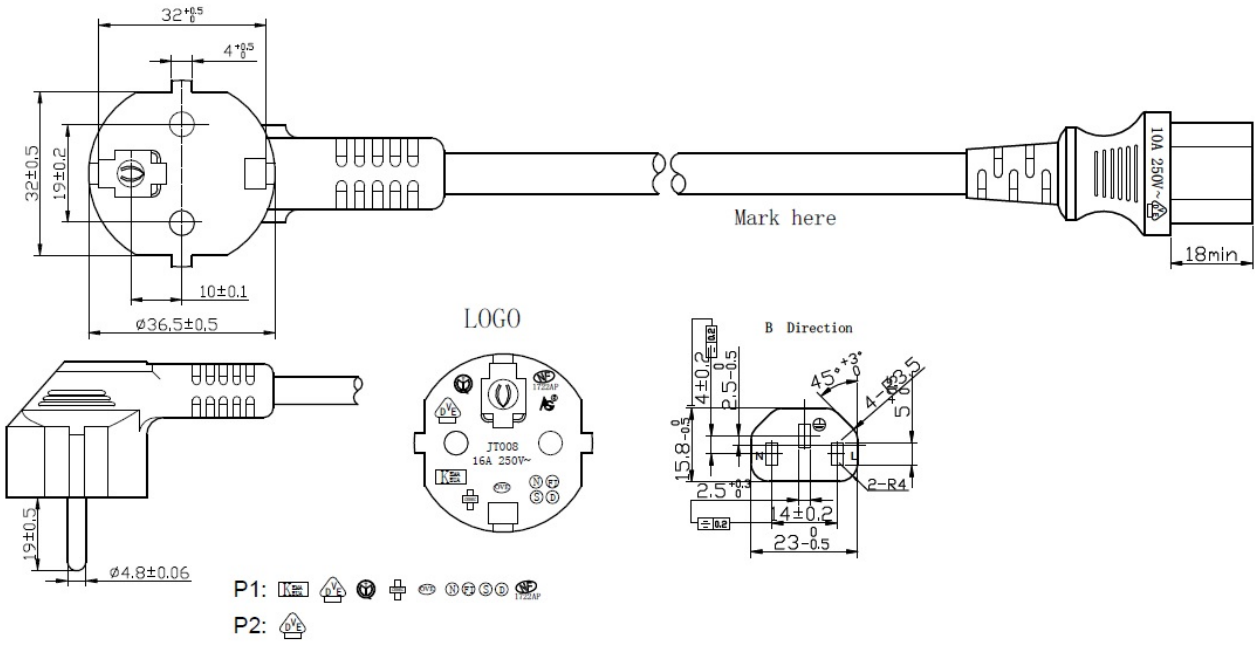

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION