



DATASHEET

Extension Cable C14 180° - C13 180°, Black, 0.5 m, 3 x 1.00 mm², IEC Lock

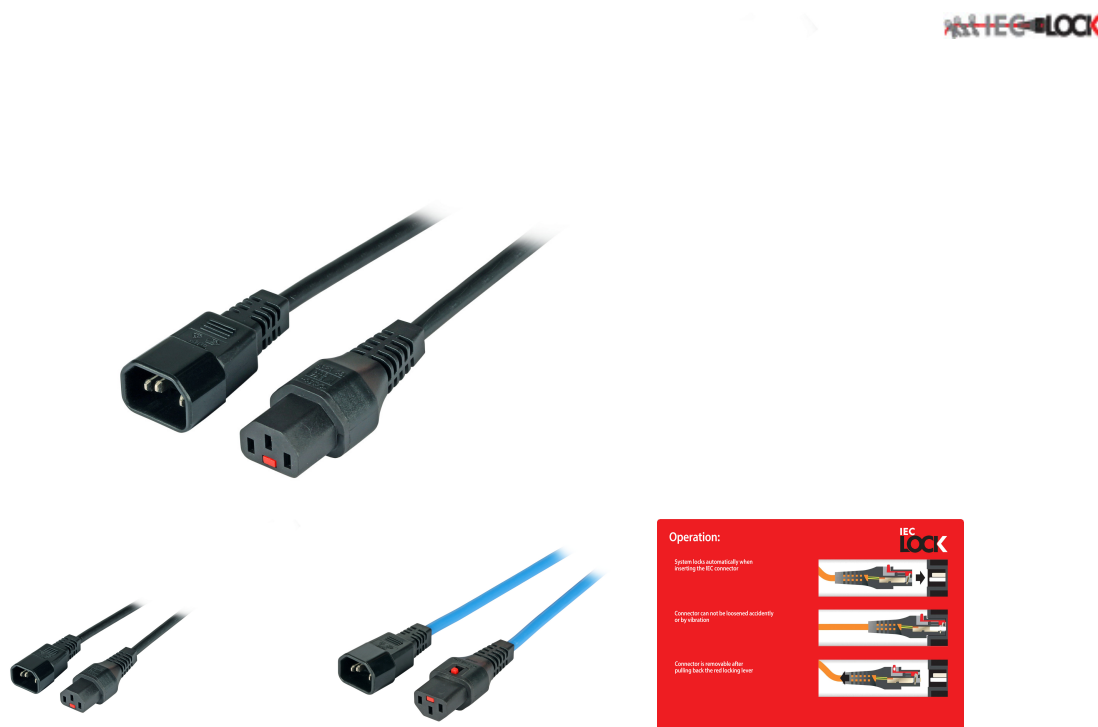

General data

With „IEC Lock“: prevents accidentally removing of the C13 jack from devices

After connecting, the C13 jack only can be released after sliding back the red latch

10 A / 250 V VDE tested (optional: orange, blue, grey, white)

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Degree of protection	Length	Nominal cross section conductor	Outer diameter approx.
EK601SW.0,5	Extension Cable C14 180° - C13 180°, Black, 0.5 m, 3 x 1.00 mm ² , IEC Lock	black	IP20	0.5 m	1.00 mm ²	7.1 mm
EK601SW.1	Extension Cable C14 180° - C13 180°, Black, 1.0 m, 3 x 1.00 mm ² , IEC Lock	black	IP20	1.0 m	1.00 mm ²	7.1 mm
EK601SW.1,5	Extension Cable C14 180° - C13 180°, Black, 1.5 m, 3 x 1.00 mm ² , IEC Lock	black	IP20	1.5 m	1.00 mm ²	7.1 mm
EK601SW.2	Extension Cable C14 180° - C13 180°, Black, 2.0 m, 3 x 1.00 mm ² , IEC Lock	black	IP20	2.0 m	1.00 mm ²	7.1 mm

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.



DATASHEET

Extension Cable C14 180° - C13 180°, Black, 0.5 m, 3 x 1.00 mm², IEC Lock

EK601SW.3	Extension Cable C14 180° - C13 180°, Black, 3.0 m, 3 x 1.00 mm ² , IEC Lock	black	IP20	3.0 m	1.00 mm ²	7.1 mm
-----------	--	-------	------	-------	----------------------	--------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.

