


DATASHEET

FTTH Indoor Drop Cable 3mm LSOH, 2 fiber G.657.A2, CPR Dca

- ① - Optical fiber : Optical fiber 250µm
- ② - Insulated : semi-tight 900µm LSOH
- ③ - Strength members : Aramid yarns
- ④ - Outer sheath : LSOH NF EN 50290-2-27 Compliant

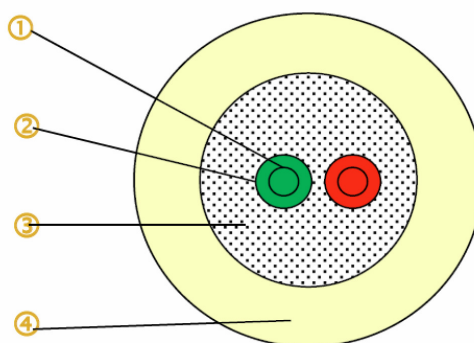

General data

Laying indoors

The cable is compatible with an installation in service shaft, and visible mounting by bonding or stapling.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category	Number of fibres	Tensile force max.	Construct	Bending radius	Weight
FTTH-DROP-2	FTTH Indoor Drop Cable 3mm LSOH, 2 fiber G.657.A2, CPR Dca	Dca	3,0 mm	OS2	2	15da N	2 x Singlemode G.657.A2	20 mm	11 kg/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 12-09-2026 . Technical changes reserved.

