


DATASHEET

RJ45-Hirose TM11 red 50 pcs.

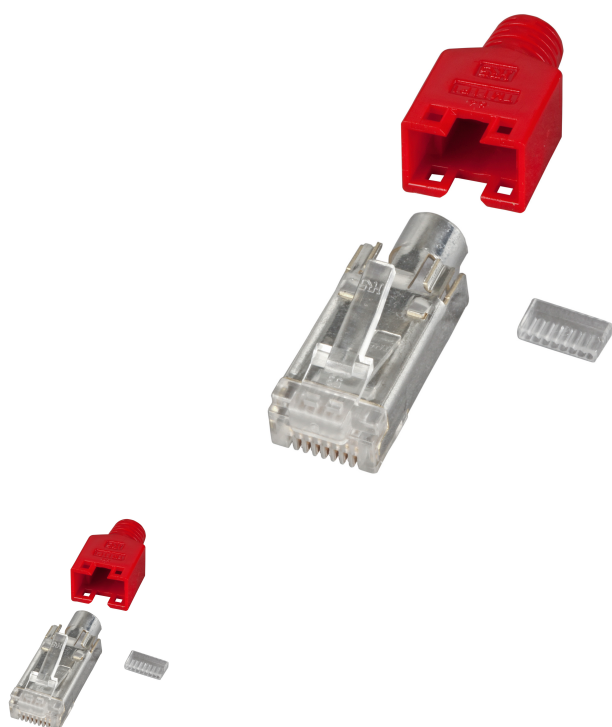

General data

Up to 100 MHz (Cat.5e)
For stranded wires (AWG 24/7, AWG 26/7, AWG 27/7)
Shielded version
Core insulation about 0.9 - 1.0 mm
Cable diameter max. 5.8 mm
The set consists of RJ plug, anti-kink sleeve and guide plate
Suitable crimping tool DCW1002 + DCW1002.1 or 39934.2

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour
H7540.6-50	RJ45-Hirose TM11 red 50 pcs.	red
H7540.6-100	RJ45-Hirose TM11 red 100 pcs.	red

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

