


DATASHEET

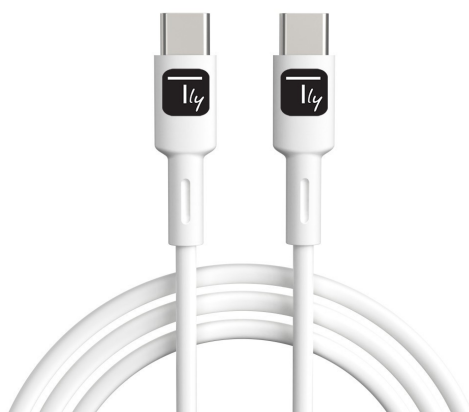

General data

USB-C™ male to USB-C™ male cable

Connect a USB-C™ device to another USB-C™ device

Supports speeds up to 480Mbps and fast charging up to 3.0A

Hi-Speed USB for ultra-fast transfers without data degradation

USB 2.0 standard; Tangle-free design; Colour: white

Charge a USB-C™ powered device such as a notebook, Macbook Pro® or tablet from a USB-C™ PD wall charger or power bank

Standards and Certifications

USB 2.0

Connectors

Two male USB-C™ connectors

Plated nickel

Connector cover in PVC

Cable:

Cable material: TPE

Connector cover material: ABS

Recharge up to 3A

Copper wires: 2*65 pcs*Φ0.1mm + 3*10 pcs*Φ0.1mm

This datasheet was created automatically on 02-10-2026 . Technical changes reserved.



DATASHEET

Fast Charging Protocol: PD, FCP, QC 3.0/4.0, AFC
Fast charging: 3A 20V 60W (max output)

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length
ICOC-MUSB20-C60W1		white	1.0 m
ICOC-MUSB20-C60W2		white	2.0 m

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 02-10-2026 . Technical changes reserved.

