
DATASHEET







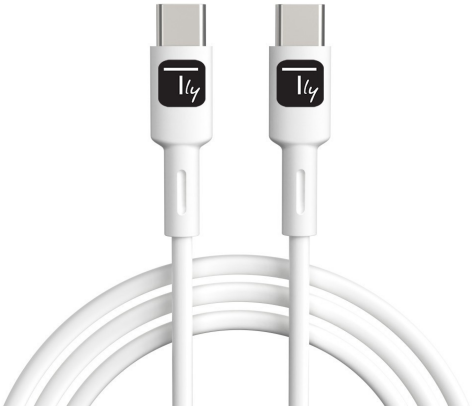

General data

USB-C™ male to USB-C™ male cable
Connect a USB-C™ device to another USB-C™ device
Supports speeds up to 480Mbps and fast charging up to 3.0A
Hi-Speed USB for ultra-fast transfers without data degradation
USB 2.0 standard; Tangle-free design; Colour: white

Charge a USB-C™ powered device such as a notebook, Macbook Pro® or tablet from a USB-C™ PD wall charger or power bank

Standards and Certifications
USB 2.0
Connectors
Two male USB-C™ connectors
Plated nickel
Connector cover in PVC
Cable:
Cable material: TPE
Connector cover material: ABS
Recharge up to 3A
Copper wires: 2*65 pcs*Φ0.1mm + 3*10 pcs*Φ0.1mm

This datasheet was created automatically on 22-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

Fast Charging Protocol: PD, FCP, QC 3.0/4.0, AFC
Fast charging: 3A 20V 60W (max output)

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length
ICOC-MUSB20-C60W1		white	1.0 m
ICOC-MUSB20-C60W2		white	2.0 m

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION