


DATASHEET

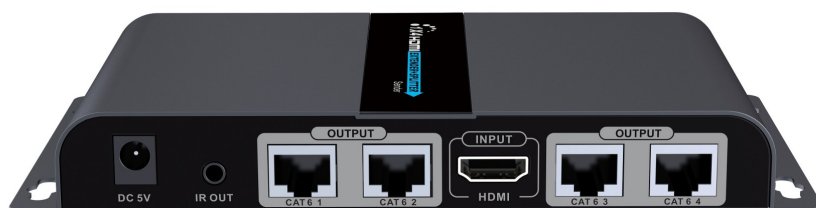

General data

- Distribute 1 HDMI source to 4 HD displays over network cable simultaneously
- Compatible with CAT6/6a/7 network cables
- The highest resolution supported is up to 1080p / 60Hz
- Extend HDMI signal up to 50m/164ft over CAT6 cable
- Support IR pass back for remote control source device easily
- Uncompressed and zero latency
- Plug and play

Tekniske egenskaber

Available variants

ArtNr. **Bezeichnung** **Number of camera inputs** **Number of monitor outputs**

ArtNr.	Bezeichnung	Number of camera inputs	Number of monitor outputs
IDATA-EX-HL41TY		1	4

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

