
# DATASHEET

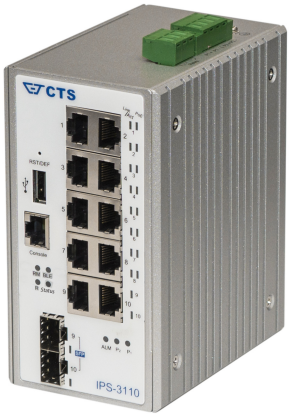


## General data

8 x PoE Injector IEEE802.3at/af with up to 30 W per port
Management: SNMP, WEB, CLI
Features: IGMP, QOS, VLAN and much more
Dual Rate SFP Slot for 100-FX and 1000-BaseX
Wide range of operation voltage 12 .. 48 V DC
Auto-MDI/MDI-X function
Dual Rate SFP Slot
Redundant power supply input
Temperature range -40°C .. +75°C
Rugged metal housing, EMV-secure, protection class IP40
DIN-Rail or wall mounting possible
Suitable DIN-Rail power supply : DR-240-48

## Tekniske egenskaber

## Available variants

| ArtNr. | Bezeichnung | Max. PoE power |
|---|---|---|
| IPS-3110SFP | | 240 W |

**Note on Intended Use**

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

**This datasheet was created automatically on 08-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION