


# DATASHEET

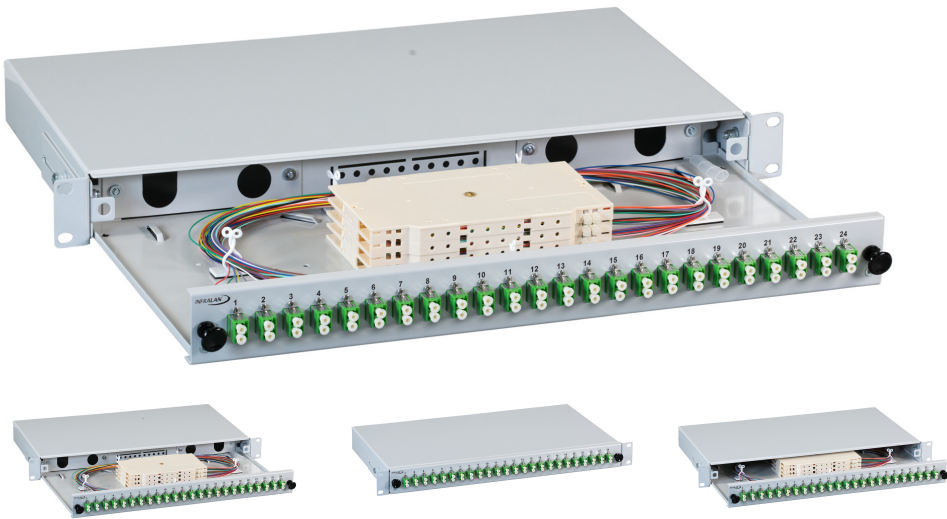

## General data

Completely equipped INFRALAN® splice box with adapter and through-dyed pigtails  
The LC Pigtails are stripped off and inserted into the splice cassette  
Measurement protocols of LC Pigtails are stored in the box  
Metal housing depth adjustable (45mm) via 19" mounting bracket  
All versions of the splice box are supplied with 24 coupling openings and fitted with blind inserts if the number of used ports is reduced.  
Rear cable entry with 2x M20 openings on each side. The M20 openings can also be made laterally by replacing the opening plate with an angle plate (SB-A-GR-WINKEL). In addition, there is a central cable entry for 20x Simplex cables (up to 4.3mm).  
incl. 1 x PG16  
6 x self-adhesive fiber guides

## Tekniske egenskaber

## Available variants

| ArtNr.               | Bezeichnung | Colour | Pigtail | Type of connector external | With number of couplings/adapters |
|----------------------|-------------|--------|---------|----------------------------|-----------------------------------|
| ISB-LCDU-12-5-SW-ABA |             | black  | 24 x LC | LC-Duplex                  | 12                                |
| ISB-LCDU-24-5-SW-ABA |             | black  | 48 x LC | LC-Duplex                  | 24                                |

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.

