DATASHEET

USB3.0 Connection Cable A-A, M-M, 3.0m, black, Premium



General data

For data transmission rates up to 5 Gbit/s. Wire construction: AWG30 / AWG20. Shielding: Foil + 80% braiding. Plug moulded.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length	Diameter	AWG
K5210SW.1	USB3.0 Connection Cable A-A, M-M, 1.0m, black, Premium	black	1.0 m	5.8 mm	20+30AWG
K5210SW.1,8	USB3.0 Connection Cable A-A, M-M, 1.8m, black, Premium	black	1.8 m	-	-
K5210SW.3	USB3.0 Connection Cable A-A, M-M, 3.0m, black, Premium	black	3.0 m	5.8 mm	20+30AWG
K5210SW.5	USB3.0 Connection Cable A-A, M-M, 5.0m, black, Premium	black	5.0 m	5.8 mm	20+30AWG

datasheets.content.drawings

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld


fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50


info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION


DATASHEET

USB3.0 Connection Cable A-A, M-M, 3.0m, black, Premium

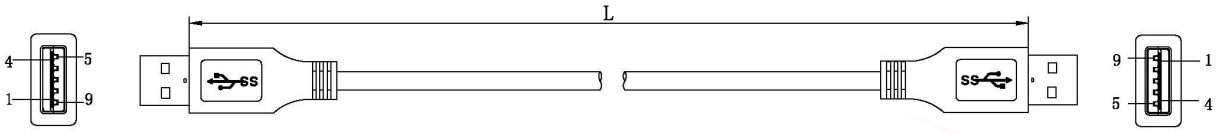

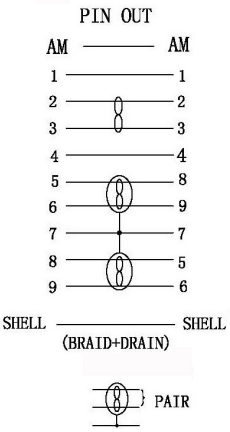

NOTES:
1. MATERIALS
   1.1 CABLE: AWG30 PIMF * 2P (SS) + AWG30 * 1P (HS) + 2C AWG20 (POWER)
   DETAIL: (7/0.10BC*1P+7/0.10BC+FAM) *2PCS+7/0.32BC*2C+7/0.10BC*1P+
   AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET;
   OD: 5.5±0.15MM
   CABLE PRINTING: USB 3.0 SUPER SPEED CABLE
   1.2 USB 3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION,
   GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
   1.3 ALL HOOD: MOLDED BLACK PVC.
2. TESTING: 100% OPEN AND SHORT TEST.
3. PACKING: 1PC/PE BAG.
4. ALL MATERIAL BE RoHS COMPLIANT.



P/N

NUMBER	L
K5210SW.1	1000±30MM
K5210SW.1,8	1800±50MM
K5210SW.3	3000±70MM
K5210SW.5	5000±70MM

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION