


DATASHEET

USB3.0 Connection Cable A-B, M-M, 1.0m, black, Premium

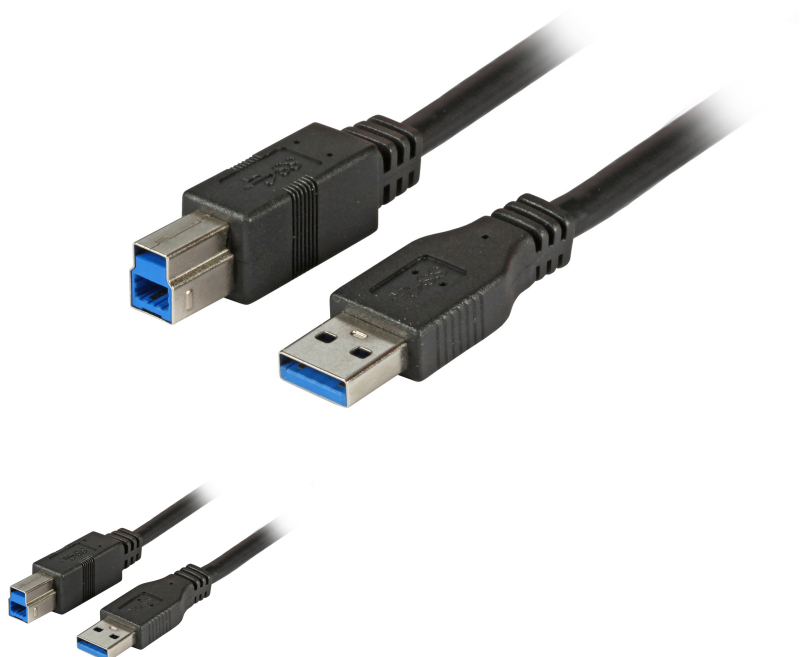

General data

For data transmission rates up to 5 Gbit/s. Wire construction: AWG30 / AWG20. Shielding: Foil + 80% braiding. Plug moulded.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length	Diameter	AWG
K5236.1	USB3.0 Connection Cable A-B, M-M, 1.0m, black, Premium	Black	1.0 m	5.8 mm	20+30AWG
K5236.1.8	USB3.0 Connection Cable A-B, M-M, 1.8m, black, Premium	Black	1.8 m	5.8 mm	20+30AWG
K5236.3	USB3.0 Connection Cable A-B, M-M, 3.0m, black, Premium	Black	3.0 m	5.8 mm	20+30AWG
K5236.5	USB3.0 Connection Cable A-B, M-M, 5.0m, black, Premium	Black	5.0 m	5.8 mm	20+30AWG


datasheets.content.drawings

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.



DATASHEET

USB3.0 Connection Cable A-B, M-M, 1.0m, black, Premium

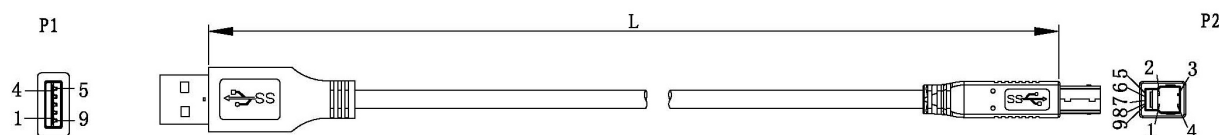

NOTES:

1. MATERIALS

- 1.1 CABLE: AWG30 PIMF * 2P (SS) + AWG30 * 1P (HS) + 2C AWG20 (POWER)
 DETAIL: (7/0.10BC*1P+7/0.10BC+FAM)*2PCS+7/0.32BC*2C+7/0.10BC*1P+
 AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET;
 OD: 5.5 ± 0.15MM

CABLE PRINTING: USB 3.0 SUPER SPEED PREMIUM CABLE AWM STYLE 2725 80°C 30V AWG 30/AWG20

- 1.2 P1: USB3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION,
 GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
 1.3 P2: USB3.0 B TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION,
 GOLD PLATED CONTACTS, NICKEL PLATED SHELL.



- 1.4 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

- 100% OPEN AND SHORT TEST.
 3. PACKING: 1PC/PE BAG.
 4. ALL MATERIAL BE ROHS COMPLIANT.

P/N

NUMBER	L
K5236.1	1000 ± 30MM
K5236.1, 8	1800 ± 50MM
K5236.3	3000 ± 70MM
K5236.5	5000 ± 70MM

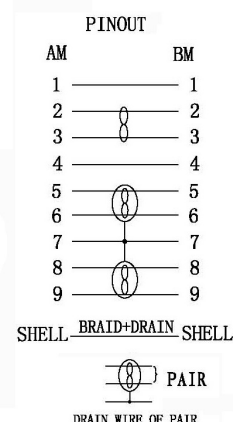

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.

