DATASHEET

USB3.0 Extension Cable A-A, M-F, 1.8m, black, Premium



General data

For data transmission rates up to 5 Gbit/s. Wire construction: AWG30 / AWG20. Shielding: Foil + 80% braiding. Plug moulded.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length	Diameter	AWG
K5237.1	USB3.0 Extension Cable A-A, M-F, 1.0m, black, Premium	black	1.0 m	5.8 mm	20+30AWG
K5237.1,8	USB3.0 Extension Cable A-A, M-F, 1.8m, black, Premium	black	1.8 m	5.8 mm	20+30AWG
K5237.3	USB3.0 Extension Cable A-A, M-F, 3.0m, black, Premium	black	3.0 m	5.8 mm	20+30AWG
K5237.5	USB3.0 Extension Cable A-A, M-F, 5.0m, black, Premium	black	5.0 m	5.8 mm	20+30AWG

datasheets.content.drawings

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld


fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

USB3.0 Extension Cable A-A, M-F, 1.8m, black, Premium

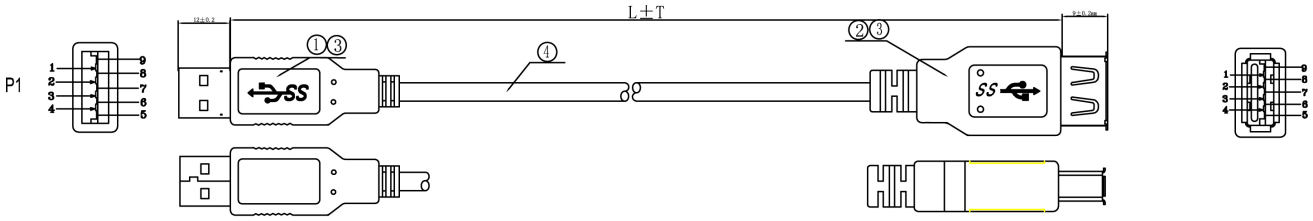


NOTE:

1. PRINTING: AWM 80℃ 30V VW-1 YSB3.0 Super Speed Cable
2. RoHS compliant.
3. Operating Temperature: -15℃-80℃

NO.	MAT. NAME	DESCRIPTION	Q'TY
④	CABLE	USB 3.0 28AWG(7/0.127TC*1P+E+WAM)*2+(7/0.127TC*1P)+(7/0.127TC*2C)+AEB E=0.127TC AL-MG JACKET:PVC/BLACK OD:.5.3±0.2mm	1 Pcs
③	OUTER MOLD	PVC 88A BLACK	2 Pcs
②	CONNECTOR	USB3.0 AF TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE INSULATOR	1 Pcs
①	CONNECTOR	USB3.0 AM TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE INSULATOR	1Pcs

PIN OUT



ITEM NO	LENGHT
K5237.1	1000±30mm
K5237.1,8	1800±50mm
K5237.3	3000±70mm
K5237.5	5000±70mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION