DATASHEET

USB2.0 Connection Cable A-A, M-M, 1.5m, black, Classic



General data

Supports data transmission rates up to 480 Mbit/s. Wire construction: AWG28 / AWG24. Shielded: folie + braiding. Plug moulded.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length
K5253SW.0,5	USB2.0 Connection Cable A-A, M-M, 0.5m, black, Classic	black	0.5 m
K5253SW.1	USB2.0 Connection Cable A-A, M-M, 1.0m, black, Classic	black	1.0 m
K5253SW.1,5	USB2.0 Connection Cable A-A, M-M, 1.5m, black, Classic	black	1.5 m
K5253SW.1,8	USB2.0 Connection Cable A-A, M-M, 1.8m, black, Classic	black	1.8 m
K5253SW.3	USB2.0 Connection Cable A-A, M-M, 3.0m, black, Classic	black	3.0 m
K5253SW.5	USB2.0 Connection Cable A-A, M-M, 5.0m, black, Classic	black	5.0 m

datasheets.content.drawings

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld


fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de


WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

USB2.0 Connection Cable A-A, M-M, 1.5m, black, Classic

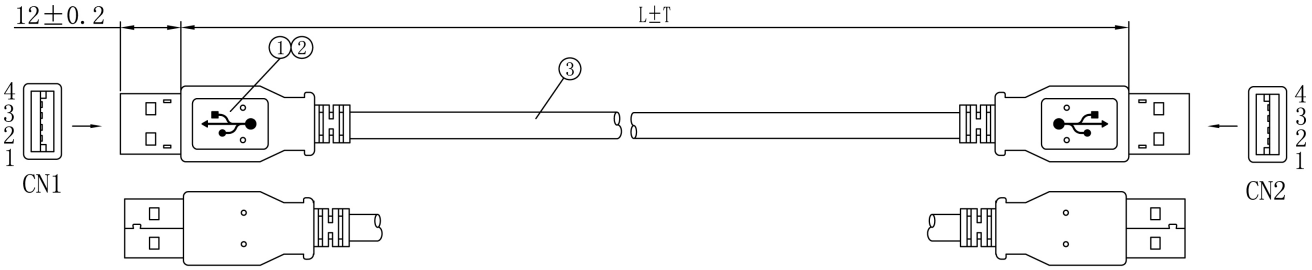

PIN OUT



BLACK	
ITEM NO.	LENGTH
K5253SW.0,5	500±5mm
K5253SW.1,0	1000±10mm
K5253SW.1,5	1500±15mm
K5253SW.1,8	1800±18mm
K5253SW.3,0	3000±30mm
K5253SW.5,0	5000±50mm

NOTE:

1. PRINTING: AWM 80° C 30V VW-1 28AWGx1P
   24AWGx2C USB2.0 HIGHSPEED CABLE
2. RoHS compliant.
3. Operating Temperature: -15℃-80℃

NO.	MAT. NAME	DESCRIPTION	Q'TY
3	CABLE	28AWG*1P+24AWG*2C+AL+B USB2.0 HIGHSPEED CABLE JACKET:PVC/BLACK OD: 4.5±0.2mm	1
2	OVERMOLD	PVC COLOR:BLACK	2
1	CONNECTOR	USB A TYPE MALE, NICKEL PLATED SHELL, 1U"GOLD PLATED PIN, WHITE INSULATOR	2 Set

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION