# DATASHEET

## USB2.0 Connection Cable A-A, M-M, 5.0m, black, Classic



### General data

Supports data transmission rates up to 480 Mbit/s. Wire construction: AWG28 / AWG24. Shielded: folie + braiding. Plug moulded.

### Tekniske egenskaber

### Available variants

| ArtNr. | Bezeichnung | Colour | Length |
|---|---|---|---|
| K5253SW.0,5 | USB2.0 Connection Cable A-A, M-M, 0.5m, black, Classic | black | 0.5 m |
| K5253SW.1 | USB2.0 Connection Cable A-A, M-M, 1.0m, black, Classic | black | 1.0 m |
| K5253SW.1,5 | USB2.0 Connection Cable A-A, M-M, 1.5m, black, Classic | black | 1.5 m |
| K5253SW.1,8 | USB2.0 Connection Cable A-A, M-M, 1.8m, black, Classic | black | 1.8 m |
| K5253SW.3 | USB2.0 Connection Cable A-A, M-M, 3.0m, black, Classic | black | 3.0 m |
| K5253SW.5 | USB2.0 Connection Cable A-A, M-M, 5.0m, black, Classic | black | 5.0 m |

### datasheets.content.drawings

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld


fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de


WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

# DATASHEET

## USB2.0 Connection Cable A-A, M-M, 5.0m, black, Classic

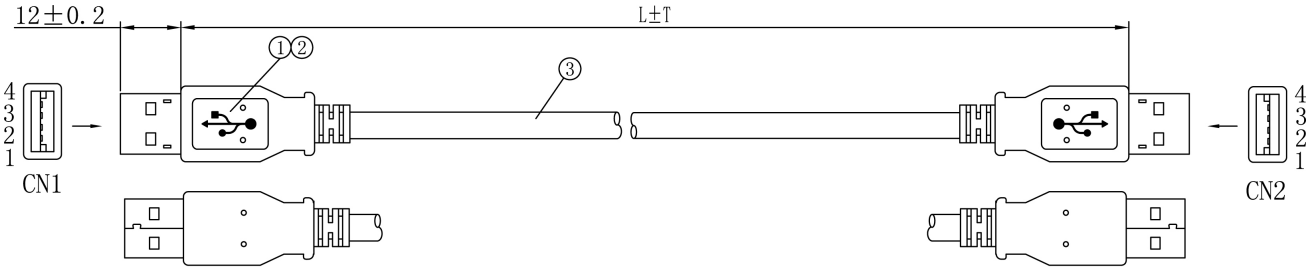


PIN OUT




| BLACK | |
|---|---|
| ITEM NO. | LENGTH |
| K5253SW.0,5 | 500±5mm |
| K5253SW.1,0 | 1000±10mm |
| K5253SW.1,5 | 1500±15mm |
| K5253SW.1,8 | 1800±18mm |
| K5253SW.3,0 | 3000±30mm |
| K5253SW.5,0 | 5000±50mm |

NOTE:

1. PRINTING: AWM 80° C 30V VW-1 28AWGx1P
   24AWGx2C USB2.0 HIGHSPEED CABLE
2. RoHS compliant.
3. Operating Temperature: -15℃-80℃

| NO. | MAT. NAME | DESCRIPTION | Q'TY |
|---|---|---|---|
| 3 | CABLE | 28AWG*1P+24AWG*2C+AL+B USB2.0 HIGHSPEED CABLE<br>JACKET:PVC/BLACK OD: 4.5±0.2mm | 1 |
| 2 | OVERMOLD | PVC COLOR:BLACK | 2 |
| 1 | CONNECTOR | USB A TYPE MALE, NICKEL PLATED SHELL,<br>1U"GOLD PLATED PIN, WHITE INSULATOR | 2 Set |

**Note on Intended Use**

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION