

DATASHEET

USB3.0 Connection Cable A-A, M-M, 1.0m, black, Classic



Classic



General data

For data transmission rates up to 5 Gbit/s. Wire construction: AWG32 / AWG28 (1.0 m) and AWG30 / AWG24 (1.8 - 5.0 m). Plug moulded.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length	Diameter	AWG
K5280SW.1	USB3.0 Connection Cable A-A, M-M, 1.0m, black, Classic	Black	1.0 m	5.0 mm	28AWG
K5280SW.5	USB3.0 Connection Cable A-A, M-M, 5.0m, black, Classic	Black	5.0 m	5.0 mm	28AWG


datasheets.content.drawings

This datasheet was created automatically on 05-10-2026 . Technical changes reserved.



DATASHEET

USB3.0 Connection Cable A-A, M-M, 1.0m, black, Classic

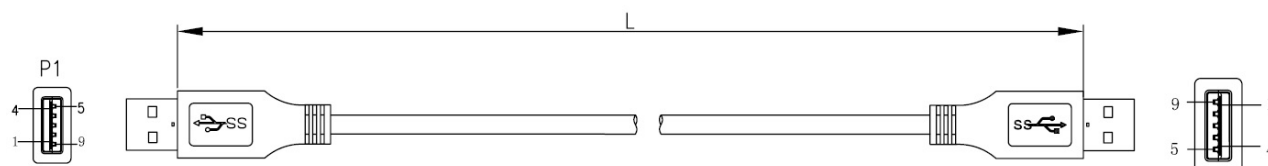

NOTES:

1. MATERIALS

- 1.1 CABLE: 30AWG (7/0. 10BC*1P+7/0. 10BC+FAM)*2PCS+24AWG (7/0. 20BC*2C) + 28AWG (7/0. 12BC*1P)+AM+28AWG (7/0. 12BC)+128/0. 12ALM+BLACK PVC JACKET
OD=5.5 ± 0.15MM.

CABLE PRINTING: USB 3.0 SUPER SPEED CABLE

- 1.2 P1&P2: USB 3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.

- 1.3 ALL HOOD: MOLDED BLACK PVC.


2. TESTING: 100% OPEN AND SHORT TEST.

3. PACKING: 1PC/PE BAG.

4. ALL MATERIAL BE ROHS COMPLIANT.

P/N

NUMBER	L
K5280SW. 1, 8	1800±50MM
K5280SW. 3	3000±70MM
K5280SW. 5	5000±70MM

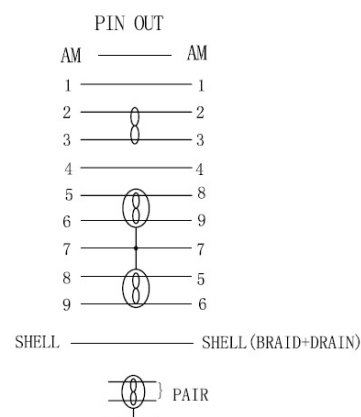

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 05-10-2026 . Technical changes reserved.

