DATASHEET

USB3.0 Connection Cable A-A, M-M, 5.0m, black, Classic



General data

For data transmission rates up to 5 Gbit/s. Wire construction: AWG32 / AWG28 (1.0 m) and AWG30 / AWG24 (1.8 - 5.0 m). Plug moulded.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Colour	Length	Diameter	AWG
K5280SW.1	USB3.0 Connection Cable A-A, M-M, 1.0m, black, Classic	black	1.0 m	5.0 mm	28AWG
K5280SW.5	USB3.0 Connection Cable A-A, M-M, 5.0m, black, Classic	black	5.0 m	5.0 mm	28AWG

datasheets.content.drawings

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld


fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET


USB3.0 Connection Cable A-A, M-M, 5.0m, black, Classic

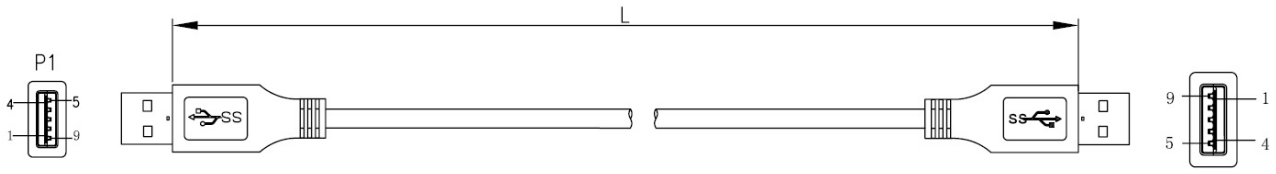

NOTES:
1. MATERIALS
   1.1 CABLE:30AWG(7/0.10BC*1P+7/0.10BC+FAM)*2PCS+24AWG(7/0.20BC*2C)+
   28AWG(7/0.12BC*1P)+AM+28AWG(7/0.12BC)+128/0.12ALM+BLACK PVC JACKET
   OD=⌀5.5 ± 0.15MM.
   CABLE PRINTING: USB 3.0 SUPER SPEED CABLE
   1.2 P1&P2: USB 3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION,
   GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
   1.3 ALL HOOD: MOLDED BLACK PVC.
2. TESTING: 100% OPEN AND SHORT TEST.
3. PACKING: 1PC/PE BAG.
4. ALL MATERIAL BE ROHS COMPLIANT.

P/N

NUMBER	L
K5280SW.1,8	1800±50MM
K5280SW.3	3000±70MM
K5280SW.5	5000±70MM

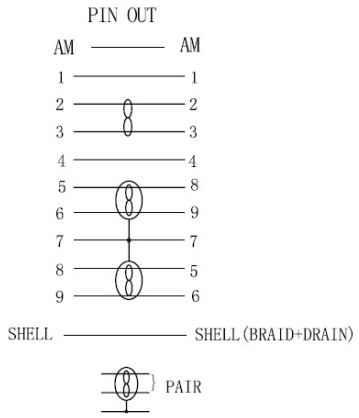

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION