DATASHEET

RJ45 Patch Cord Cat.6 S/FTP LSZH grey 0,5m



General data

RJ45 patch cable Cat.6 S/FTP LSZH

The Cat.6 patch cable meets the requirements for 5Gbit Ethernet and has gold-plated contacts.

Technical product features
• Cat.6
• S/FTP cable with AWG27/7
• Sheath material made of halogen-free LSZH
• Fire protection: flame-retardant, halogen-free, low smoke
• Plug connection: RJ45 to RJ45
• With locking lever protection
• Has gold-plated contacts< br>
The jacket of the shielded patch cable is made of halogen-free LSZH material and has a length imprint on the

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

RJ45 Patch Cord Cat.6 S/FTP LSZH grey 0,5m

grommet. In addition, the cable offers the option of power supply via PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt.

The assignment of the RJ45 plugs is according to TIA/EIA 568B and is 1:1 . Suitable for the temperature range 0 - 60 °C.

The LAN cable has a conductor material made of copper and is ideal for use in structured building cabling, industrial Ethernet and in data centers. This achieves a bandwidth of 250 MHz.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
K5510.0,15	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 0,15m	0.15 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.0,25	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 0,25m	0.25 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.0,5	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 0,5m	0.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.0,75	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 0,75m	0.75 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.1	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 1m	1.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.1,5	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 1,5m	1.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.2	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 2m	2.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.3	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 3m	3.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.5	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 5m	5.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.7,5	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 7,5m	7.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.10	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 10m	10.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K5510.15	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 15m	15.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5510.20	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 20m	20.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5510.25	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 25m	25.0 m	PoE acc. to IEEE802.3af	±5 %
K5510.30	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 30m	30.0 m	PoE acc. to IEEE802.3af	±5 %

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de


WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

RJ45 Patch Cord Cat.6 S/FTP LSZH grey 0,5m

K5510.40	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 40m	40.0 m	No	±5 %
K5510.50	RJ45 Patch Cord Cat.6 S/FTP LSZH grey 50m	50.0 m	No	±5 %

datasheets.content.drawings

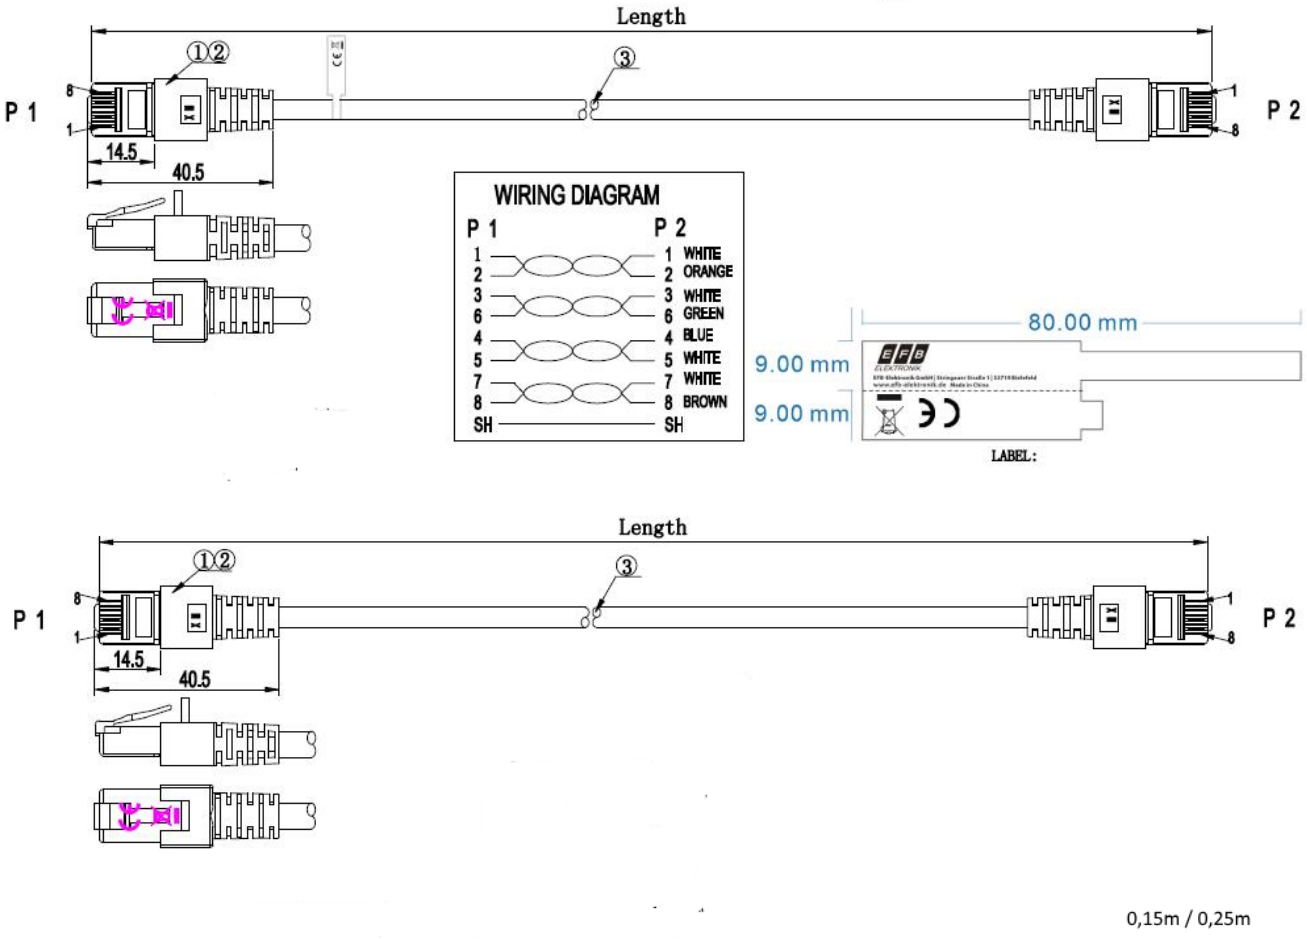

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.