


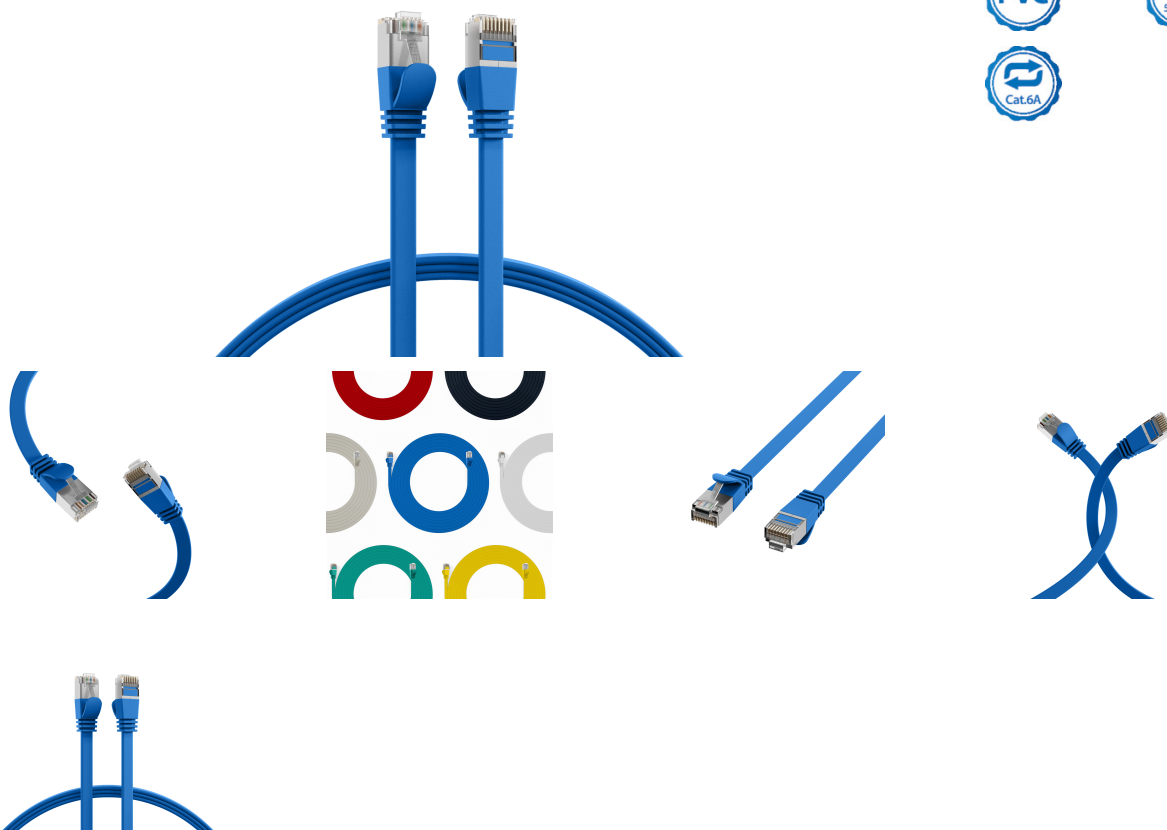

Page 1/3

DATASHEET

The assignment of the particularly short RJ45 plugs is 1:1 and follows TIA/EIA 568B. Suitable for the temperature range -20 - 55 °C.


The Ethernet cable has a copper conductor material and is ideal for applications in structured building cabling, industrial Ethernet and data centers. This achieves a bandwidth of 500 MHz.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
K5545BL.0,25	RJ45 Flat Patch Cord Cat.6A U/FTP PVC blue 0,25m	0.25 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5545BL.0,5	RJ45 Flat Patch Cord Cat.6A U/FTP PVC blue 0,5m	0.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5545BL.1	RJ45 Flat Patch Cord Cat.6A U/FTP PVC blue 1m	1.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5545BL.1,5	RJ45 Flat Patch Cord Cat.6A U/FTP PVC blue 1,5m	1.5 m	PoE acc. to IEEE802.3af	±5 %
K5545BL.2	RJ45 Flat Patch Cord Cat.6A U/FTP PVC blue 2m	2.0 m	PoE acc. to IEEE802.3af	±5 %
K5545BL.3	RJ45 Flat Patch Cord Cat.6A U/FTP PVC blue 3m	3.0 m	PoE acc. to IEEE802.3af	±5 %
K5545BL.5	RJ45 Flat Patch Cord Cat.6A U/FTP PVC blue 5m	5.0 m	PoE acc. to IEEE802.3af	±5 %
K5545BL.0,15		0.15 m		

datasheets.content.drawings

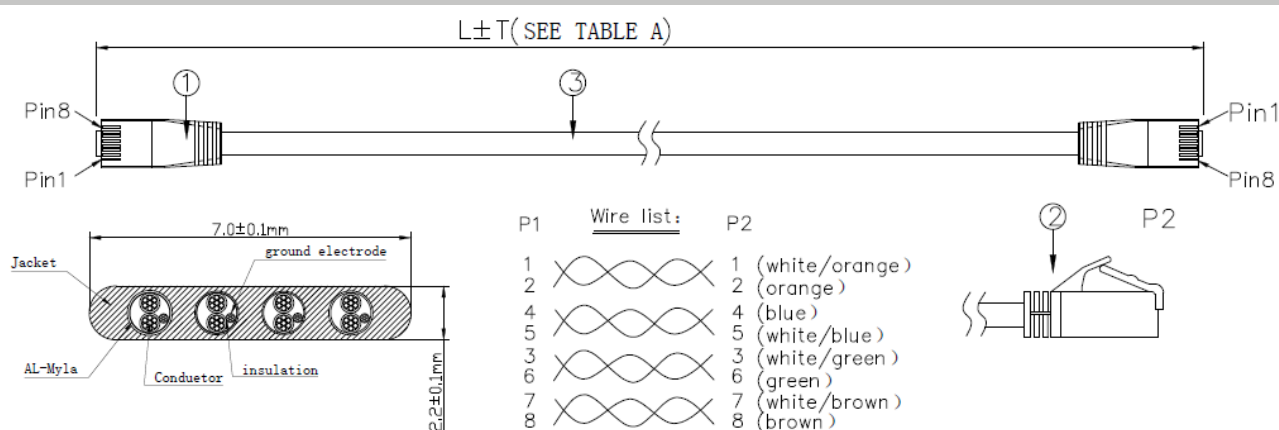

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

DATASHEET

specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

