


DATASHEET

RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 0,25m

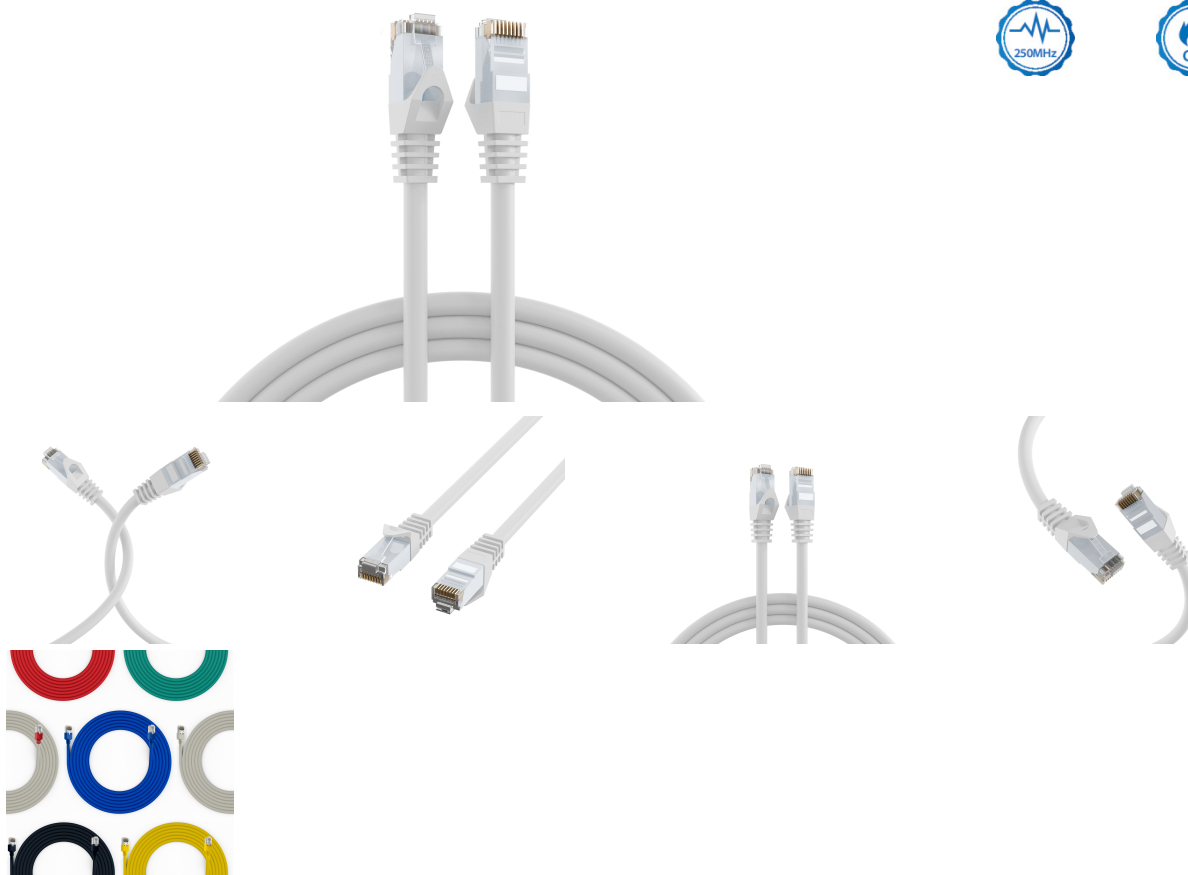

General data

RJ45 patch cable Cat.6 U/UTP LSZH CCA

The Cat.6 patch cable has gold-plated contacts and meets the requirements for 5Gbit Ethernet.

Technical product features

- Cat.6
- U/UTP cable with AWG24/7
- Jacket material made of halogen-free LSZH
- Fire protection: flame-retardant, halogen-free, low smoke
- Plug connection: RJ45 to RJ45
- With locking lever protection
- Has gold-plated contacts

This datasheet was created automatically on 13-09-2026 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 0,25m

The jacket of the patch cable is made of halogen-free LSZH material. The cable also offers the option of power supply via PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt.

The assignment of the RJ45 plugs is 1:1 and follows TIA/EIA 568B .

The data cable has a conductor material made of CCA and is ideal for applications in structured building cabling, industrial Ethernet and data centers. The frequency range is up to 250 MHz.

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
K8104WS.0,25	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 0,25m	0.25 m	No	±5 %
K8104WS.0,5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 0,5m	0.5 m	No	±5 %
K8104WS.1	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 1m	1.0 m	No	±5 %
K8104WS.1,5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 1,5m	1.5 m	No	±5 %
K8104WS.2	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 2m	2.0 m	No	±5 %
K8104WS.3	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 3m	3.0 m	No	±5 %
K8104WS.5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 5m	5.0 m	No	±5 %
K8104WS.7,5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 7,5m	7.5 m	No	±5 %
K8104WS.10	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 10m	10.0 m	No	±5 %
K8104WS.15	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 15m	15.0 m	No	±5 %
K8104WS.20	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 20m	20.0 m	No	±5 %
K8104WS.25	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 25m	25.0 m	No	±5 %
K8104WS.30	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 30m	30.0 m	No	±5 %
K8104WS.50	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA white 50m	50.0 m	No	±5 %

datasheets.content.drawings

This datasheet was created automatically on 13-09-2026 . Technical changes reserved.



Length

CN1

8

1

1

2

3

40mm REF

WIRING DIAGRAM

CN1 (568B)	CN2 (568B)
1	1 WHITE-ORANGE
2	2 ORANGE
3	3 WHITE-GREEN
6	6 GREEN
4	4 BLUE
5	5 WHITE-BLUE
7	7 WHITE-BROWN
8	8 BROWN

0,15m / 0,25m

80.00 mm

9.00 mm

9.00 mm

EFD

ELEKTRONIK

8740 Bredaerdweg 1 (Schippersteede 1) 1327 PB Breda

www.elektronik8.de

MADE IN CHINA

RECYCLING SYMBOL

LABEL:

Length

CN1

8

1

1

2

3

40mm REF

WIRING DIAGRAM

CN1 (568B)	CN2 (568B)
1	1 WHITE-ORANGE
2	2 ORANGE
3	3 WHITE-GREEN
6	6 GREEN
4	4 BLUE
5	5 WHITE-BLUE
7	7 WHITE-BROWN
8	8 BROWN

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

