
# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 7,5m

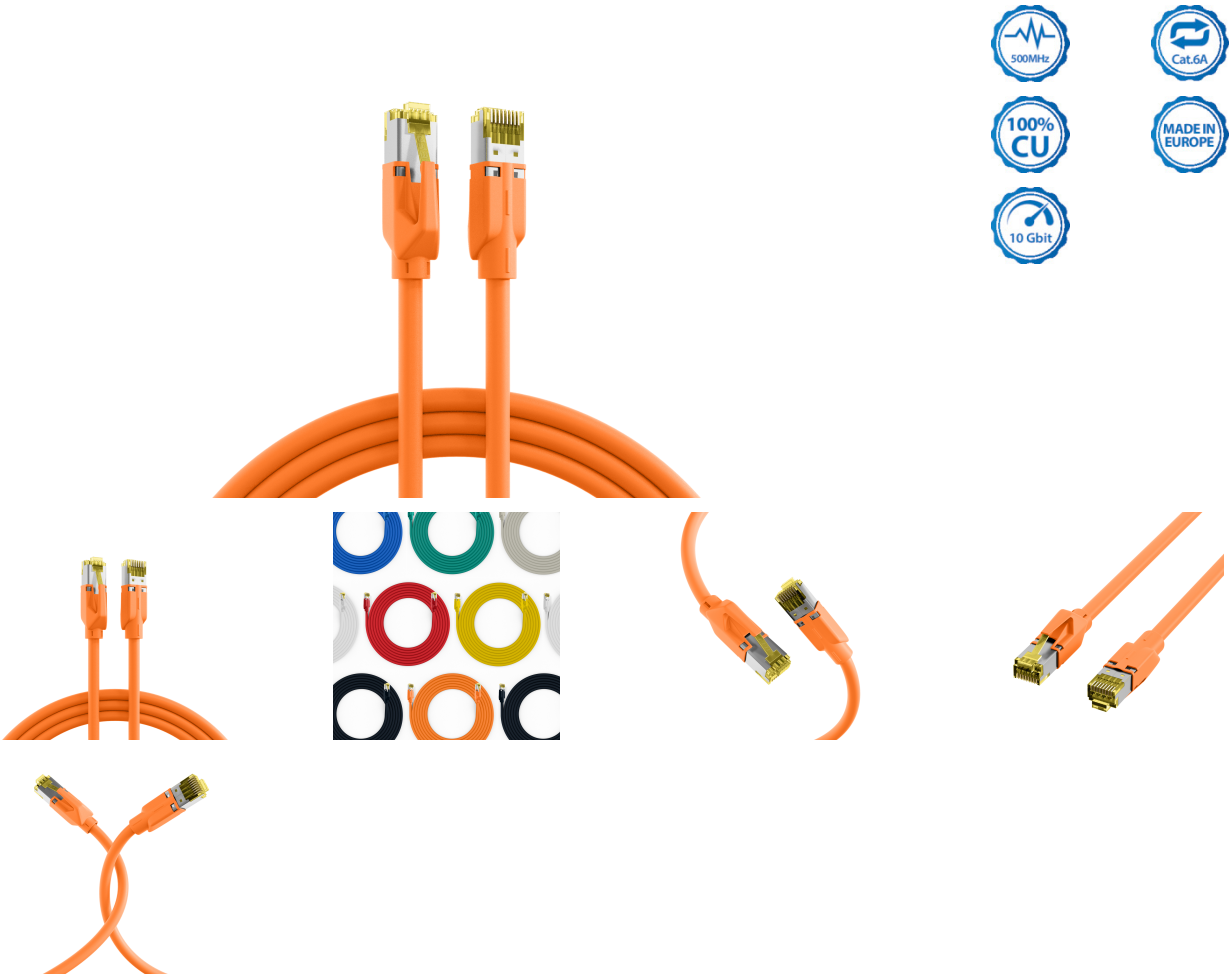


### General data

RJ45 patch cable Cat.6A S/FTP LSZH Draka UC900 TM31

The Cat.6A (TIA) patch cable meets the requirements for 10Gbit Ethernet and has gold-plated contacts.

Technical product properties
- Cat .6A (TIA)
- S/FTP cable with AWG26/7
- Jacket material made of halogen-free LSZH
- Fire protection: flame-retardant, halogen-free, low smoke
- Plug connection: RJ45 to RJ45
- With Locking lever protection

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 7,5m

• Has gold-plated contacts

The jacket of the shielded patch cable is made of halogen-free LSZH material. In addition, the cable offers the option of power supply via PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt.

The assignment of the yellow TM31 plugs is 1:1 and follows TIA/EIA 568B.

The LAN cable has a conductor material made of copper and is ideal for use in structured building cabling, industrial Ethernet and data centers. A bandwidth of up to 500 MHz is possible.

### Tekniske egenskaber

### Available variants

| ArtNr. | Bezeichnung | Length | POE class | Length tolerance |
|---|---|---|---|---|
| K8560OR.0,50 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 0,5m | 0.5 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.1 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 1m | 1.0 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.1,5 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 1,5m | 1.5 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.2 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 2m | 2.0 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.3 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 3m | 3.0 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.5 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 5m | 5.0 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.7,5 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 7,5m | 7.5 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.10 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 10m | 10.0 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 % |
| K8560OR.15 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 15m | 15.0 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at | ±5 % |
| K8560OR.20 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 20m | 20.0 m | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at | ±5 % |
| K8560OR.25 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 25m | 25.0 m | PoE acc. to IEEE802.3af | ±5 % |
| K8560OR.30 | RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 30m | 30.0 m | PoE acc. to IEEE802.3af | ±5 % |
| K8560OR.0,15 | | 0.15 m | | |
| K8560OR.0,25 | | 0.25 m | | |

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH Draka UC900 TM31 orange 7,5m

| | | |
|---|---|---|
| K8560OR.40 | | 40.0 m |
| K8560OR.50 | | 50.0 m |

**Note on Intended Use**

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION