


DATASHEET

MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 15m

100 Gbit

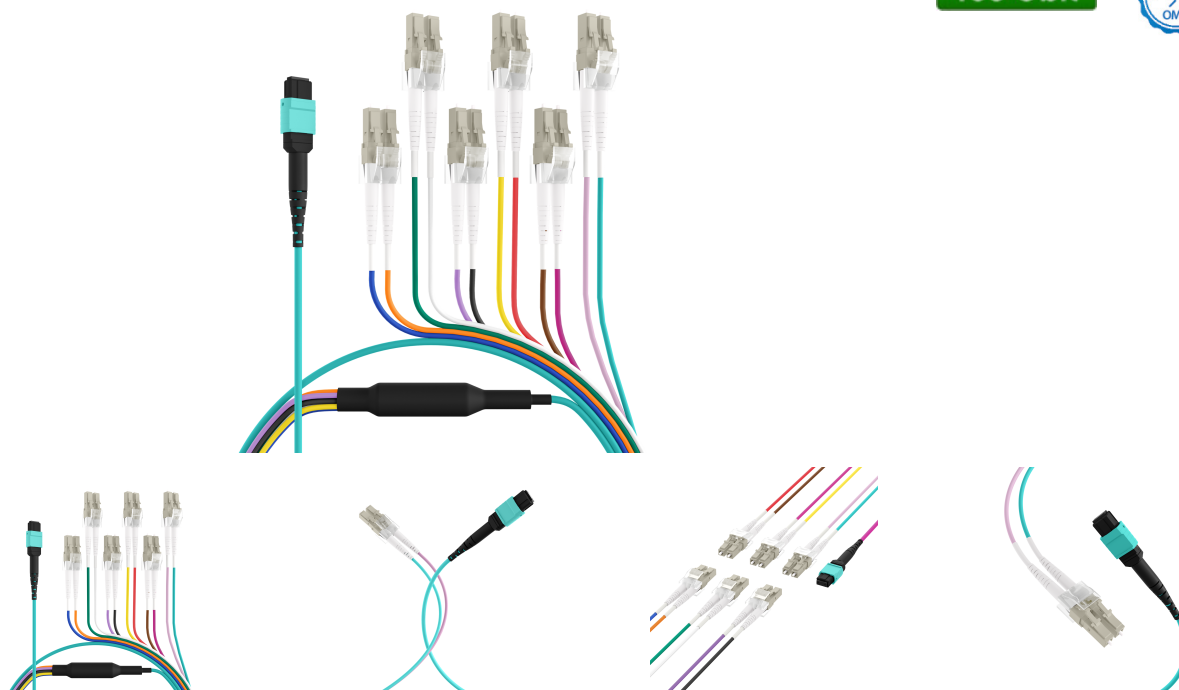

General data

Application: Suitable for transmission links up to **100 Gigabit**

Construction: 1 multi-connector MTP® on one side,
6 LC-Duplex connector on the other side

LowLoss version: attenuation per Fanout max. 0,35dB

Matrix: 12 fibers

Furcation length: 50cm

Cable diameter multi-connector: 3mm

Cable diameter single-connector: 2mm

Colour: OM5, OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Halogen free (according to EN 60754-1/2)	Number of Length connectors connection 1	Number of connectors connection 2	Number of fibres
--------	-------------	---	--	---	---------------------

This datasheet was created automatically on 23-09-2026 . Technical changes reserved.




DATASHEET

MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 15m

MTPF12LCOM3-2	MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 2m	True	2.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOM3-3	MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 3m	True	3.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOM3-5	MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 5m	True	5.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOM3-7,5	MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 7,5m	True	7.5 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOM3-10	MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 10m	True	10.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOM3-15	MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 15m	True	15.0 m	1 x MTP® (F)	12 x LC	12

datasheets.content.drawings

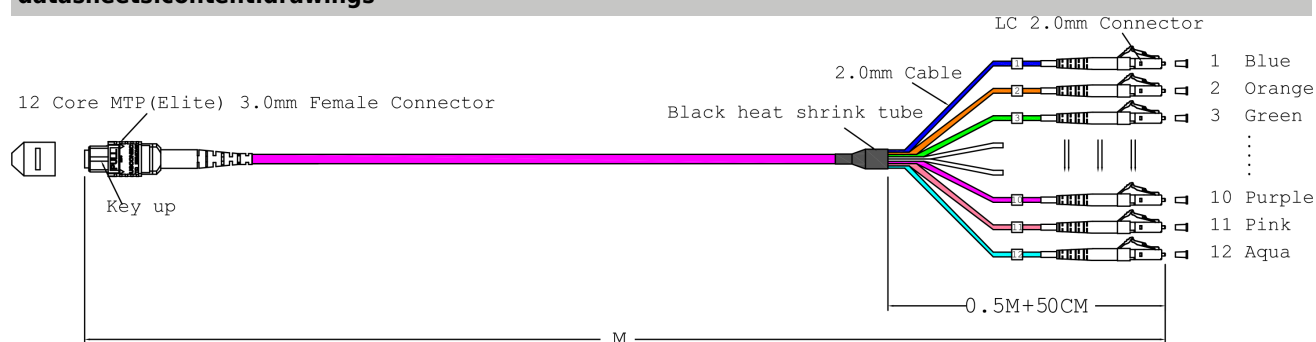

This datasheet was created automatically on 23-09-2026 . Technical changes reserved.

DATASHEET

MTP®(F)-LC Trunk cable OM3 12 fibers Typ B LSZH aqua 15m



Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-09-2026 . Technical changes reserved.