


DATASHEET

MTP®(F)-LC Trunk cable OM5 12 fibers Typ B LSZH lime-green 5m

100 Gbit

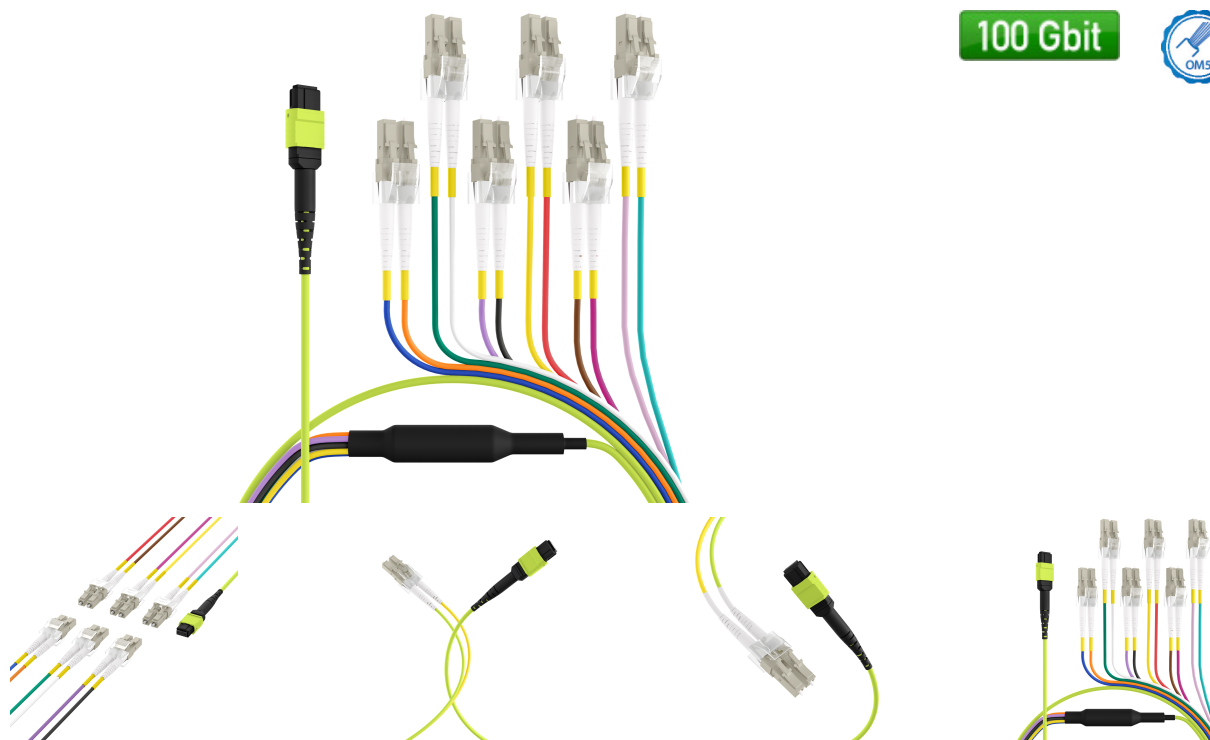

General data

Application: Suitable for transmission links up to **100 Gigabit**
 Construction: 1 multi-connector MTP® on one side,
 6 LC-Duplex connector on the other side
LowLoss version: attenuation per Fanout max. 0,35dB
 Matrix: 12 fibers
 Furcation length: 50cm
 Cable diameter multi-connector: 3mm
 Cable diameter single-connector: 2mm
 Colour: OM5, OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Halogen free (according to EN 60754-1/2)	Length	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
--------	-------------	--	--------	---	---	---------------------

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.




DATASHEET

MTP®(F)-LC Trunk cable OM5 12 fibers Typ B LSZH lime-green 5m

MTPF12LCOM5-5	MTP®(F)-LC Trunk cable OM5 12 fibers Typ B LSZH limegreen 5m	True	5.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOM5-7,5	MTP®(F)-LC Trunk cable OM5 12 fibers Typ B LSZH limegreen 7,5m	True	7.5 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOM5-10	MTP®(F)-LC Trunk cable OM5 12 fibers Typ B LSZH limegreen 10m	True	10.0 m	1 x MTP® (F)	12 x LC	12

datasheets.content.drawings

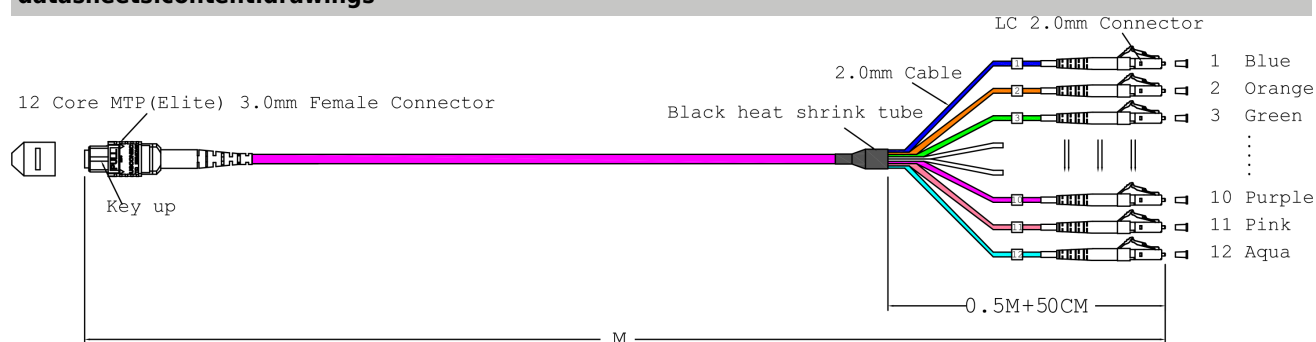

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.

DATASHEET

MTP®(F)-LC Trunk cable OM5 12 fibers Typ B LSZH lime-green 5m



Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.