


DATASHEET



100 Gbit

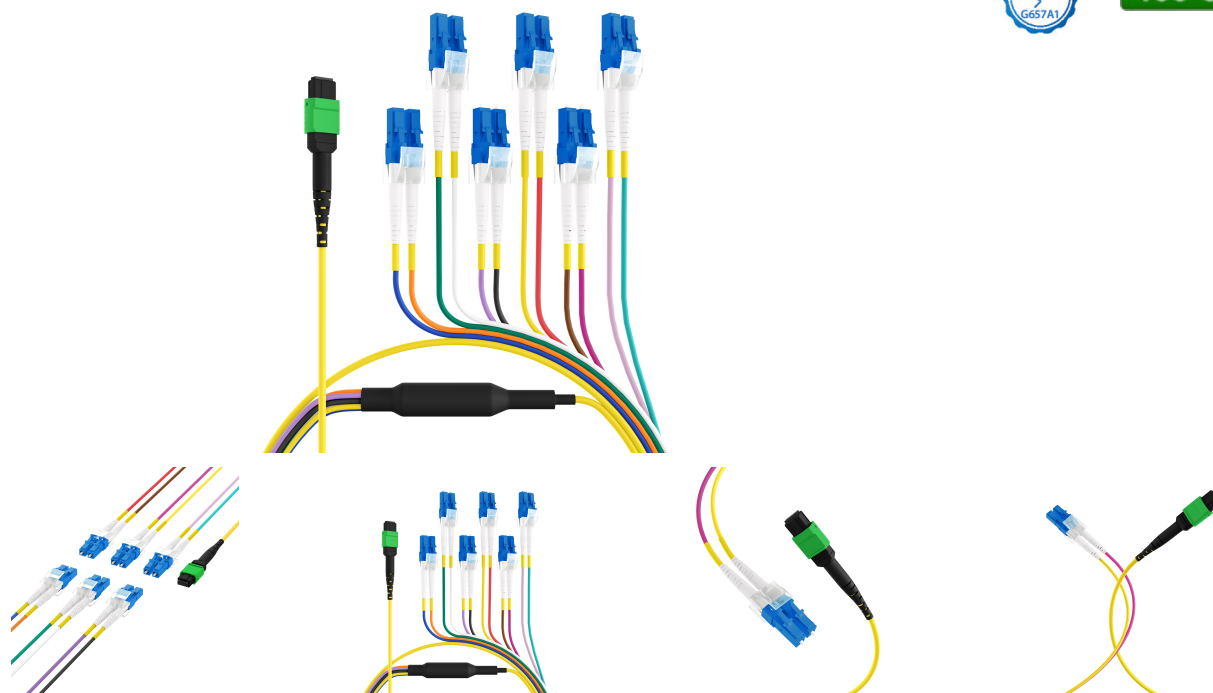

General data

Application: Suitable for transmission links up to **100 Gigabit**
 Construction: 1 multi-connector MTP® on one side,
 6 LC-Duplex connector on the other side
LowLoss version: attenuation per Fanout max. 0,35dB
 Matrix: 12 fibers
 Furcation length: 50cm
 Cable diameter multi-connector: 3mm
 Cable diameter single-connector: 2mm
 Colour: OM5, OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

MTP Singlemode connectors are in APC version

Tekniske egenskaber

Available variants

ArtNr.	Bezeichnung	Halogen free (according to EN 60754-1/2)	Number of Length connectors connection 1	Number of connectors connection 2	Number of fibres
--------	-------------	---	--	---	---------------------


This datasheet was created automatically on 22-09-2026 . Technical changes reserved.



DATASHEET

MTPF12LCOS2-1	MTP®/APC(F)-LC Trunk cable OS2 12 fibers Typ B LSZH yellow 1m	True	1.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOS2-2	MTP®/APC(F)-LC Trunk cable OS2 12 fibers Typ B LSZH yellow 2m	True	2.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOS2-3	MTP®/APC(F)-LC Trunk cable OS2 12 fibers Typ B LSZH yellow 3m	True	3.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOS2-5	MTP®/APC(F)-LC Trunk cable OS2 12 fibers Typ B LSZH yellow 5m	True	5.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOS2-10	MTP®/APC(F)-LC Trunk cable OS2 12 fibers Typ B LSZH yellow 10m	True	10.0 m	1 x MTP® (F)	12 x LC	12
MTPF12LCOS2-15		True	15.0 m	1 x MTP® (F)	12 x LC	12


datasheets.content.drawings

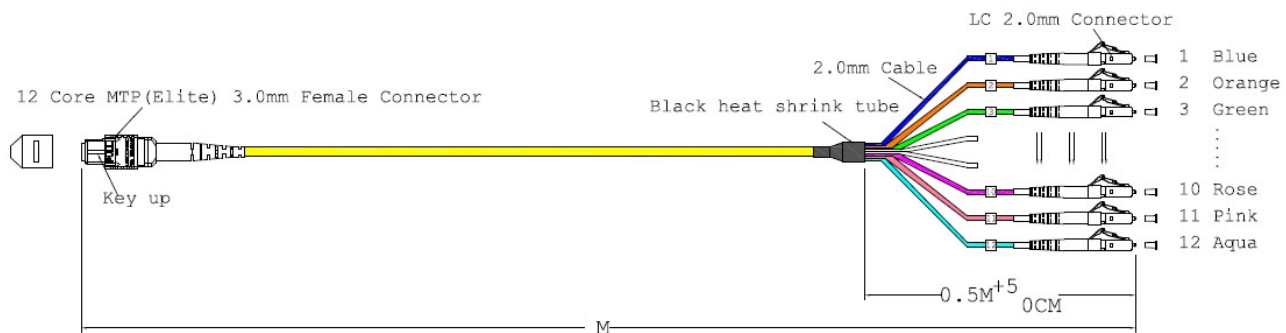

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.



DATASHEET

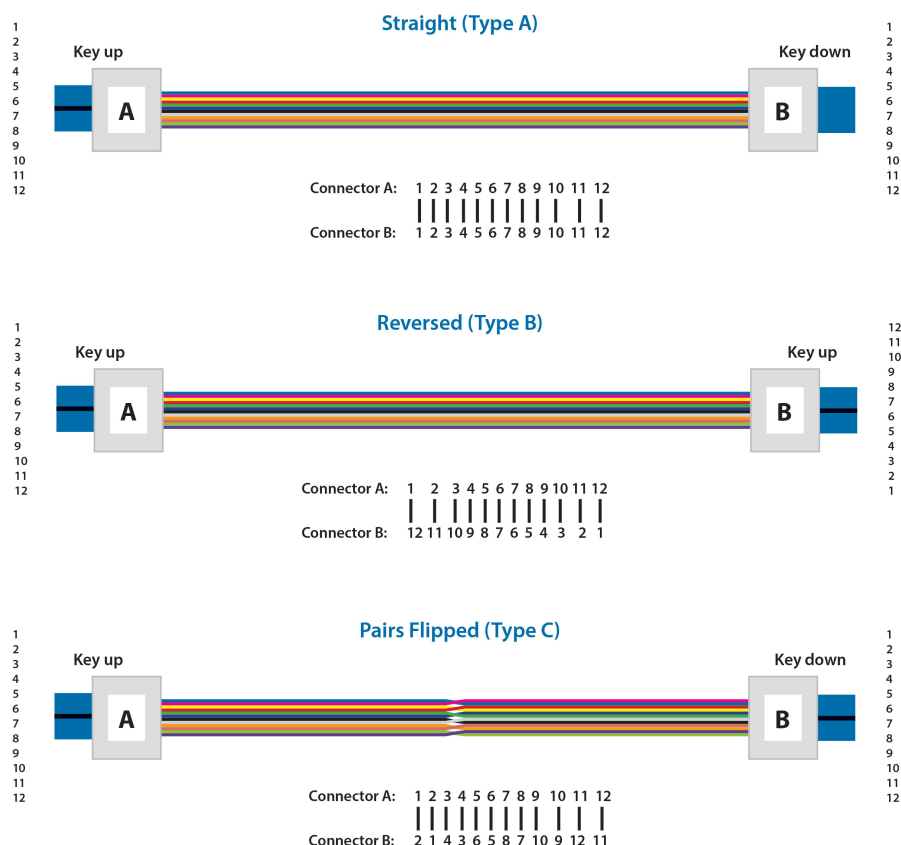

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

